

Synthetic based primer

PRODUCT

weberpremix 500 prime is a co-polymer acrylic emulsion designed to prime absorbent concrete, gypsum substrates and lightweight blocks (Autoclaved Aerated Concrete Blocks) prior to the application of gypsum and cement based plaster (including colored plaster). **weberpremix 500 prime** prevents over-rapid absorption of water into the substrate and prolongs trowel ability time.

SCOPE OF USE

Primer for substrates made of concrete, lightweight blocks (Autoclaved Aerated Concrete Blocks), foamed concrete blocks, gypsum and cement-based renders

CHARACTERISTICS

| | |
|-------------|--|
| Density | Approx. 1 kg / lit. |
| Drying Time | 1/2 to 2 hours depending on application rate and climatic conditions |

INSTRUCTIONS FOR USE

SUBSTRATE PREPARATION

The substrate must be perfectly sound, clean, dry and free from grease, oil, dust or any friable matters.

PRODUCT PREPARATION

Shake container well before use. Apply the primer evenly, using a brush, roller or small broom, over the sound, clean and dust-free surface and leave to dry to a clear thin film before applying the plaster.

It is important that the primer fill every square inch of the substrate to ensure a solid bond of the plaster.

Avoid forming of puddles.

Extremely porous substrates may require two priming coats. Clean tools with water when wet.

COVERAGE

100 to 300 ml/m² depending on the roughness and absorbency of the substrate.


STORAGE

weberpremix 500 prime has high storage stability from -20°C to +45°C. Stir always before use.

Can be stored up to 6 months after manufacturing date, in original packaging.

SAFETY PRECAUTIONS

Avoid prolonged contact with skin. Wear protective gear for hands & eyes. Splashes on the skin should be washed away

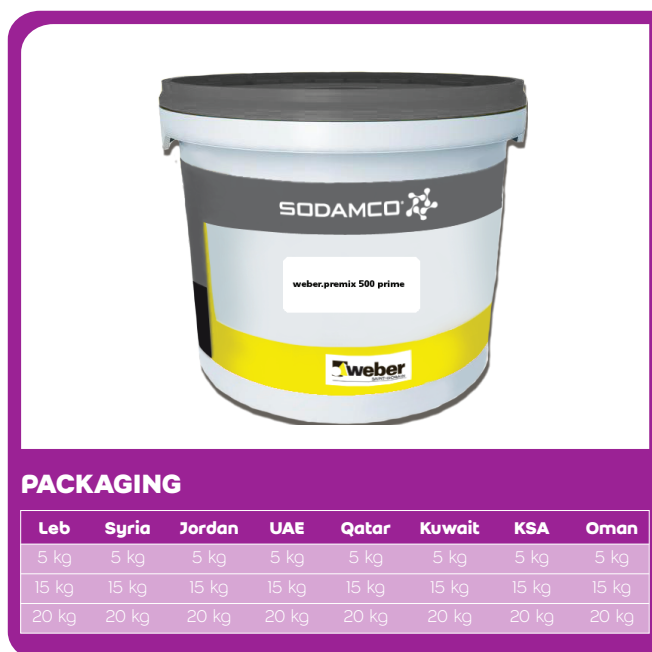

PACKAGING

| Leb | Syria | Jordan | UAE | Qatar | Kuwait | KSA | Oman |
|-------|-------|--------|-------|-------|--------|-------|-------|
| 5 kg | 5 kg | 5 kg | 5 kg | 5 kg | 5 kg | 5 kg | 5 kg |
| 15 kg | 15 kg | 15 kg | 15 kg | 15 kg | 15 kg | 15 kg | 15 kg |
| 20 kg | 20 kg | 20 kg | 20 kg | 20 kg | 20 kg | 20 kg | 20 kg |

by cleaning with soap and water. In case of contact with eyes, wash thoroughly with clean water. If swallowed, do not induce vomiting, in both cases seek medical attention. The product is non-flammable.

DISCLAIMER

While the company guarantees its products against defective materials, the use and application of these products are made without guarantee since the conditions of their application are beyond its control. It is recommended to verify with the company that the product is suitable for the intended use, and that this Data Sheet version is the latest one. The company may modify it without prior notice. Technical characteristics are listed for guidance only. For more information, please contact the company's office in your location.

NOTE

The information included on this Technical Data Sheet is the sole property of SODAMCO Holding. The unauthorized disclosure, use, dissemination or copying (either whole or partial) of this data sheet or any information it contains, is prohibited and subject to legal pursuit.

PG: 39