



Tunnels

1	weberep 360 FFR	Fill pinholes and	
		smoothen surface	
2	weberdry 150 BLC	Stop a leakage	
3	weberep 332 FR	Repair a concrete spall with a thin layer	
4	weberep 331 TX	Repair a concrete spall with apparent steel	
5	weberdry 610 i	Fill up a crack in presence of water	
6	webertec 304 VHS	Assemble prefabricated elements	
7	weberep 370 PF	Protect reinforcing bars against corrosion	
8	webertec 301	Undertake a wide repair with reinforcements	
9	webercote beton	Protect concrete against carbonation	
10	webertec epo 430 GRT-Plus	Grout rail pads	
1	weberad jet L	Spray shotcrete for lining or backfilling	
12	weberanc 405 BFX	Fix reinforcing bars before repairing	

# weberep 360 FFR

Pre-mixed cementitious paste for oair-face repair



Can be covered with various

• Fill pinholes up to 3 mm depth • Fair-face homogeneous color

20 kg

coatings

## weberdry 150 BLC

Fast setting cementitious plugging mortar



• Stops water leaks instantly

- Fast setting plugging mortar
- High pressure resistant

#### weberep 332 FR

Non-shrink thixotropic fine repair mortar with fiber



• High adhesion

• Thixotropic

#### www.sodamco-weber.com

### weberep 331 TX

weberdry 610 i

Foam forming water sealing

injection resin

TAL

#### webertec 304 VHS

Very high strength shrinkage compensated grout



# weberep 370 PF

Two-component cement based corrosion protection and bonding agent




25 or

- Durable protection of rebars
- Highly impermeable to water

• Easy to apply by brush

#### Non-shrink thixotropic repair mortar with fiber



25 or 50 kg

• Non-shrinking mortar • Thixotropic • High adhesion

• Free expansion

27.3 Kg

- Penetrates deep in fine cracks
- Does not shrink after curing
- Precision grout


25 or

50 Kg

- Non-shrinking
- Very high-strength
- Easy to apply

# weberad jet L

Shotcrete accelerating admixture



- Set Accelerator
- Achieves low rebound
- Gives high early and final strength

weberanc 405 BFX

Pure epoxy anchoring resin in cartridge



- High bond strength
- Long working time
- Used in dry and wet concrete

#### webertec 301

Non shrink mortar

for concrete structure repairs

weber

webercote beton

Protective decorative anti-carbonation treatment for concrete

## webertec epo 430 GRT-Plus

Three-component epoxy self-leveling gout




50 Kg

• Excellent adhesion • Non-shrinking • High-strength • Highly fluid

- weber 14 lit
- Protects substrates form Carbonation
- Excellent weathering resistance
- Easy to clean

- Resistant to heavy mechanical stress
- Self-levelling properties
- Highly chemical resistant



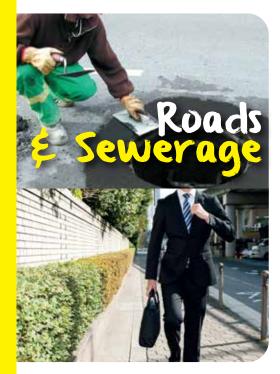

**Roads & Sewerage** 

1 7	weberep 314 RD	Embed manhole covers or repair manhole frames Repair a water supply lining
2	webertec 301	Grout street furniture (bench, bus stop)
3	weberep 350 NSG	Assemble border stones
4	weberep 332 FR	Repair concrete elements with thin layer
5	weberep 331 TX	Repair concrete elements with medium layer Make an impermeability angle fillet
6	webertec 304 VHS	Grout baseplates and threaded rods
8	weberdry 110 FX	Waterproof a manhole
1	weberdry tar ESB	Protect an immersed area against corrosion
12	weberdry 610 i	Stop a leaking crack
13	weber seal PS 1000 GG/PG	Seal an expansion joint

# weberep 314 RD

Highly early strength and fast setting filling mortar with fiber



• Low shrinking

- High early strength
- Fast setting

7

# webertec 301

Non shrink mortar for concrete structure repairs



• High strength

25 or 50 kg

- Easy to apply
- Non-shrinking
- Liquid or plastic consistency

## weberep 350 NSG

Non shrink mortar for repair and grouting



- High early strength development
- Avoids corrosion and stops rust

www.sodamco-weber.com



- Highly flexible
- Used for positive and negative
- hydrostetic pressures
- Easy to apply



# weberep 332 FR

Non-shrink thixotropic fine repair mortar with fiber



10r 884 Sweber

 Fast-hardening • Thixotropic


• High adhesion

### weberep 331 TX

#### webertec 304 VHS

Very high strength shrinkage compensated grout

> Sound I wanted 2 84 weber

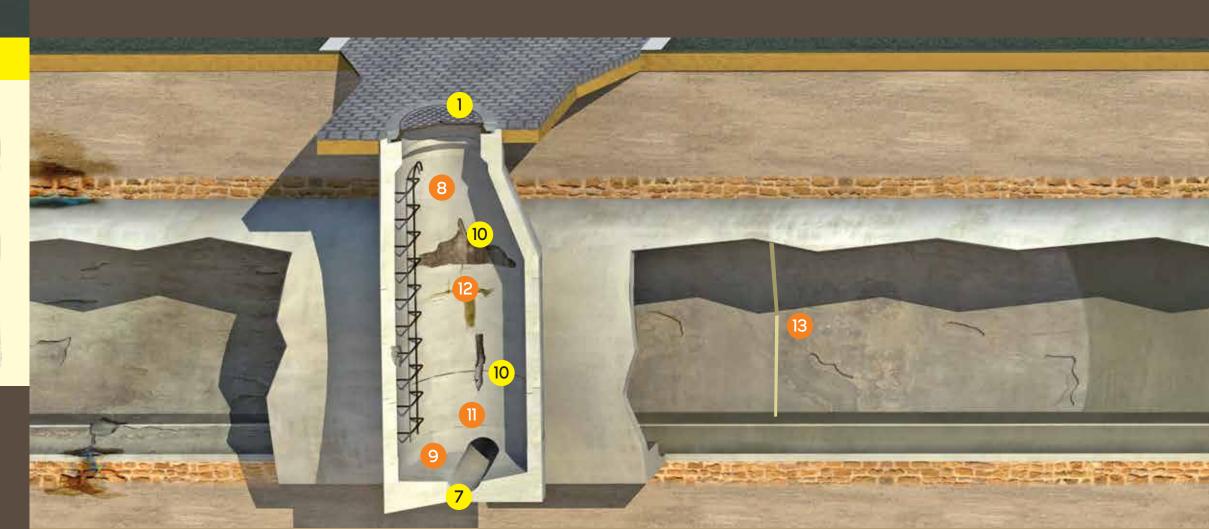

Non-shrink thixotropic repair mortar with fiber



- Non-shrinking mortar
- Thixotropic
- High adhesion

9

25 or

Precision grout

25 or

50 Kg

- Non-shrinking
- Very high-strength
- Easy to apply

weberdry 610 i	weberdry tar ESB	weber seal PS 1000 GG/PG
Foam forming water sealing injection resin	High build solvent-based coal tar epoxy coating	Two-component polysulphide joint sealant
27.3 Kg	25 Kg	25 Kg

- Free expansion • Penetrates deep in fine cracks • Does not shrink after curing
- Anti-corrosion
- Excellent chemical resistance
- Highly flexible
- Excellent adhesion properties
- Chemical resistant