

Residential

1	weberad cure WT	Curing concrete in hot weather
2	weberdry 110 FX	Waterproofing a retaining wall
3	weberdry 150 BLC	Sealing a water leak
4	weberanc 405 BFX	Anchoring reinforcement bars
5	weberdry 132 WB	waterproofing a façade
6	weberep 370 PF	Protecting steel reinforcement
7	weberdry 130 PR	Waterproofing a basement or an elevator pit
8	weberep 332 FR	Structural concrete repair with smooth finishing
9	weberep 360 FFR	Filling pinholes and hairline cracks
10	webertec 311 MC	Repair by grouting above 10 cm thick
11	weberep 331 TX	Concrete repair with exposed steel
12	webertec 301	Repair by grouting up to 10 cm thick

weberad cure WT

Curing compound for

fresh concrete surfaces

Constru

weberdry 110 FX

Flexible high-performance cement-based waterproof caoting



Excellent crack accommodation

• Resists high hydrostatic positive

weberdry 150 BLC

Fast setting cementitious plugging mortar



- Stops water leaks instantly
- Fast setting plugging mortar
- High pressure resistant

	SODAMCOX		
20 kg	0		
• High curing efficiency			

• Sprayable

• White at application

www.middleeast.weber

and negative pressures • Approved for contact with potable water

weberanc 405 BFX

Pure epoxy anchoring resin in cartridge



400 ml

- High bond strength with High load resistance
- Used in dry and wet concrete
- F 120 fire resistant

weberdry 132 WB

Renovatio

Water based surface water repellent



Easy to apply
Stainless surface waterproofing

5 or

Colorless

Two-component cement based

corrosion protection and bonding agent 6

weberep 370 PF

	Two-compon cement base ond boning og الاستاد والا الالدي والا کرد کرد کرد کرد کرد کرد کرد کرد کرد کرد	ed ction
4 Kg	ue care	

• Highly corrosion inhibiting

• Impermeable to water

Improves adhesion of overcoating

weberdry 130 PR

Cement based waterproof coating



25 Kg

- Resistant to positive and negative water pressure
- Non toxic
- Approved for contact with potable water



weber

20 Kg


10 ang Sweber

39 ka

- Non-shrinking • Fine repairs • Good resistance to sea water
- and to high-sulfate wate

- Smooth finish
- Applicable over large areas
- Available in white and light grey
- Non-shrinking
- Very High strength
- Low water absorption



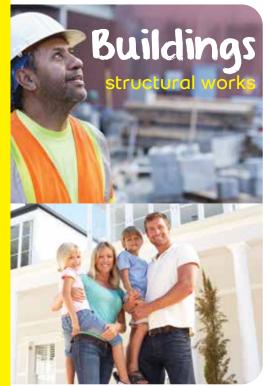

Technical

1	weberfloor epo HB 50-L	Floor surface treatment
2	webersys 2100 XPU	Car park exposed floor surface treatment
3	weberep 332 FR	Honeycombs repair up to 2 cm thickness
4	weberep 331 TX	Structural concrete repair up to 5 cm thick
5	weberdry 110 FX	Waterproofing of water tanks
6	weberep 360 FFR	Fair Face finishing
7	weberad cure WT	Curing concrete in hot weather
8	weberdry crystal	Waterproofing a retaining wall
9	webertec 302 HF	Bedding below a baseplate
10	weberanc 435	Fixing of railings
11	webertec 311 MC-HCS	Casting of concrete foundations
12	weberep epo 400 RS	Resurfacing of a floor screed



weberfloor epobat

High build solvent free heavy

duty epoxy floor coating

19 |

Hygienic, anti-bacterial & anti-fungus growth

• Abrasion & slip resistant

• Impermeable

webersys 2100 XPU

Waterprrof, crack bridging polyurethane coating system for car parks

Abrasion resistant

• UV resistant

Waterproofing

weberep 332 FFR

Non shrink thixotropic fine repair mortar with fiber



25 kg

 Non-shrinking • Fine repairs

25 Kg

• Good resistance to sea water and to high-sulfate water

www.middleeast.weber

Warehouses

weberep 331 TX

Non shrink thixotropic

repair mortar with fiber

Non-shrink thixotropic apair mortar with fiber بندره المنطقان معزز بالالياف

三日

weber

15 Kg

weberdry 110 FX

Flexible high-performance

cement-based waterproof coating

weberep 360 FFR

Pre-mixed cementitious paster for fair face repair





weberad cure WT

Curing compound for fresh concrete surfaces



- Non-shrinking Thixotropic - good bond stength • High strength
- Excellent crack accommodation • Resists high hydrostatic positive and negative pressures

51-

weber

- Approved for contact with potable water
- Smooth finish

20 Kg

- Applicable over large areas
- Available in white and light grey
- High curing efficiency
- White at application
- Sprayable

20 kg

- negative water pressure
- Removes moisture in concrete • Withstands positive and Corrosion reduction of reinforcing steel in the concrete



25 Kg

• Expansive

SODAMED

• Non-shrink

25 Kg

Pumpable

- Medium and Heavy-duty load applications
- Fast gelling and curing

300 ml

• Good bond strength with high load resistance