

Advanced Flooring Solutions



Weber worldwide

 10,000 people

 in 61 countries worldwide

 supported by almost 200 production units

We care about building better for people and the planet.

Weber Middle East

Sodamco was founded in 1984 and was integrated in Saint-Gobain Weber in 2012

 more than 800 people

 present in 10 countries in the Middle East

 17 production units



SUBSTRATE PREPARATION

Page 8

COMFORT & DECORATIVE FLOORING SOLUTIONS

Page 12

Vinyl & Rubber systems	Page 13
Carpet & linoleum systems	Page 14
Parquet & Wood systems	Page 15
Soundproof flooring systems	Page 18
Thermal insulation/Heated flooring systems	Page 22
Decorative flooring systems	Page 24
Stamped concrete system	Page 28

TECHNICAL & INDUSTRIAL FLOORING SOLUTIONS

Page 30

Outdoor floor coating system	Page 34
Car park decking system	Page 35
Indoor floor coating system	Page 36
Colored epoxy self-leveling system	Page 37
Concrete surface hardeners system	Page 38
Cement based screed system	Page 40



INTRODUCTION

Four Decades of Excellence!

With over 40 years of global experience, Weber has served a diverse range of customers by blending professional techniques with exceptional products!

Through continuous innovation, rigorous testing, and dedicated development, we expand our coverage and establish ourselves as a reliable supplier who genuinely cares!



P.13 Vinyl & Rubber systems

P.14 Carpet & linoleum systems

P.15 Parquet & Wood systems

P.18 Soundproof flooring systems

P.22 Thermal insulation/
Heated flooring systems

P.24 Decorative flooring systems

P.28 Stamped concrete system

P.28

SUBSTRATE PREPARATION

Substrate preparation is the key to a successful flooring!

Discover the essential elements for achieving optimal substrate preparation:

- Surface regularity
- Hardness
- Porosity
- Adherence
- Cleanliness
- Concrete surface profile (CSP)
- Rising damp (ground slabs)
- Substrate moisture content


Surface regularity

Assess the levelness of the substrate to avoid flooring installation defects.



Hardness

Inspect the hardness of the substrate to ensure it can resist deformation, scratching and cutting.

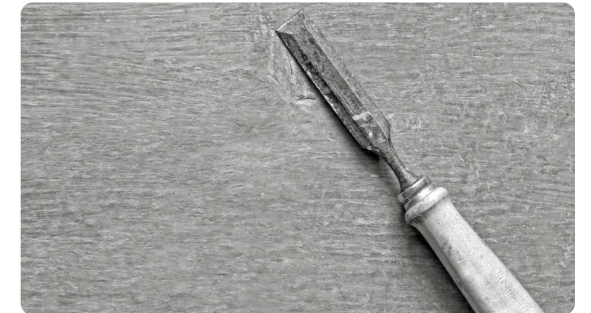

Porosity

Check the substrate porosity to prevent rapid dehydration of leveling compounds and to guarantee good adhesion.



Adherence

Inspect the adherence of an old or new substrate to guarantee that any subsequent layers will adhere properly, providing a durable and stable finish.



Cleanliness

Clean surfaces improve the adhesion, appearance, and durability of any flooring system.



Concrete surface profile (CSP)

Concrete surface profile determines the roughness of the concrete surface, which is crucial for bonding with coatings or other flooring compounds.



Rising damp

Examine the rising damp; excess moisture can weaken adhesives, causing floor coverings to lift, blister, or warp, and potentially compromising the flooring system's structure.



Moisture content

Test the substrate moisture content before installing a moisture-sensitive floor to prevent adhesive failure, discoloration, mold growth, dimensional instability, and efflorescence, ensuring a durable and high-quality installation. The carbide method is typically used for this purpose, as it is considered the most reliable technique for determining moisture content




COMFORT & DECORATIVE FLOORING SOLUTIONS

Elevate your flooring systems for lasting comfort and timeless style!

- Designed for endurance
- Resist high traffic
- Stain-resistant
- Diverse textures
- Unmatched colors
- Extend floor lifespan
- Easy-to-clean
- Create quieter environments




Vinyl and Rubber systems

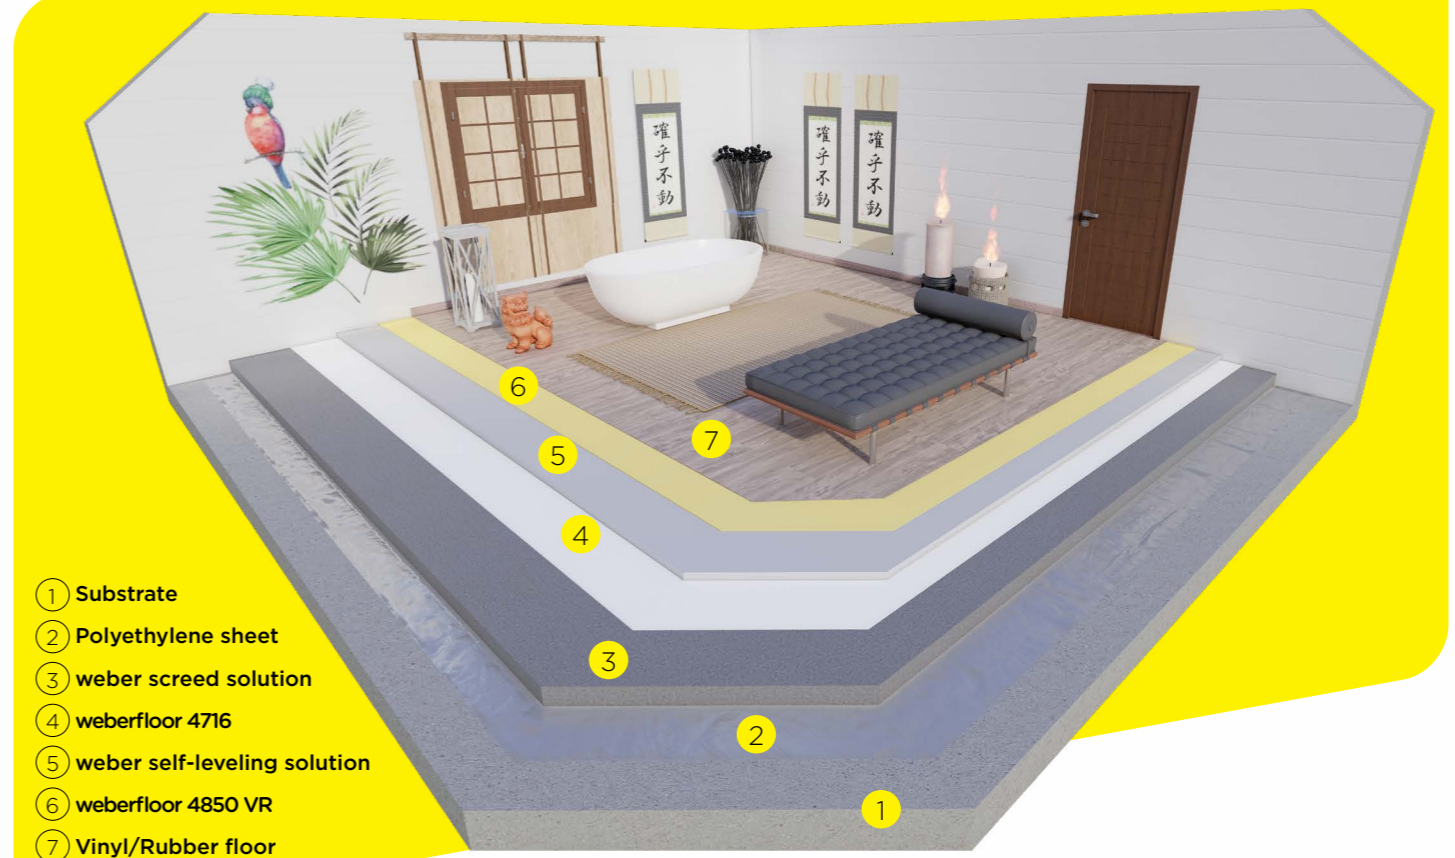


- ① Substrate
- ② Polyethylene sheet
- ③ weber screed solution
- ④ weberfloor 4716
- ⑤ weber self-leveling solution
- ⑥ weberfloor 4850 VR
- ⑦ Vinyl/Rubber floor

Enhance durability and beauty with Weber underlay solutions.

- Ready to use
- Moisture less
- Compatible layers
- Fast drying
- Consistent mixture
- Fiber reinforced
- High strength
- Fast covering
- Alkalinity barrier
- Very low shrinkage



IDEAL UNDERLAYER



LEVELING MORTARS



HIGH GRAB



DURABILITY



FOR LUXURY VINYL TILES



FOR PVC FLOORINGS

For selecting the right screed, self-leveling, or covering adhesive for Vinyl, Rubber, PVC or luxurious vinyl tiles systems, please refer to the product selector table on page 16 & 17.

Carpet and linoleum systems



- ① Substrate
- ② Slurry or primer
- ③ weber screed solution
- ④ weberfloor 4716
- ⑤ weber self-leveling solution
- ⑥ weberfloor 4825 LT
- ⑦ Carpet (textile)/Linoleum

Keep your carpet looking fresh and uniform, even in very high-traffic areas!

- 2 in 1 solution
- Easy leveling
- Cost-effective
- Fast drying
- Highly flowable
- Low shrinkage
- Fine finish
- Fast covering



PUMP APPLICATION



LOW VOC



DURABILITY



HIGH GRAB



LAYING CARPET



FOR LINOLEUM FLOORING

Parquet and wood systems




- ① Substrate
- ② Slurry or primer
- ③ weber screed solution
- ④ weberfloor 4716
- ⑤ weber self-leveling solution
- ⑥ weberfloor 4832
- ⑦ Parquet/Wood floors

Protect your parquet flooring from excess moisture to prevent warping, cupping, and gaps.


- Low shrinkage
- Rapid drying
- High strength
- Fast covering
- Alkalinity barrier
- Fiber reinforced
- Moisture less
- Compatible layers
- Fast drying
- Consistent mixture



DURABILITY



FLOORING THICKNESS



IDEAL UNDERLAYER



RAPID SET



FOR WOOD AND PARQUET FLOORINGS



PUMP APPLICATION

To select the right screed, self-leveling, or covering adhesive, for Carpets or Linoleum flooring systems, please refer to the **product selector** table on page 16 & 17.

For selecting the right screed, self-leveling, or covering adhesive for parquet or wood flooring systems, please refer to the **product selector** table on page 16 & 17.

Screed product selector

	weberfloor rapid	weberfloor rapid 40	weberfloor 620 PMB	weberfloor 630 TSC	weberfloor 628 LD	weberfloor 600 SCR	weberfloor easy 625
PROPERTIES							
Thickness (Bonded)	2-10 cm	2-10 cm	2-10 cm	3-8 cm	3-8 cm	3-5 cm	2-10 cm
Consistency	Semi-Dry	Semi-Dry	Semi-Dry	Flowable	Flowable	Flowable	Highly flowable
Foot Traffic	24 hours	24 hours	24 hours	24 hours	24 hours	24 hours	24 hours
Time to cover	4 days	4 days	4 days	3 weeks at 3 cm	3 weeks at 3 cm	3 weeks at 3 cm	2 weeks at 2 cm
Compressive strength at 28 days	30 Mpa	40 Mpa	30 Mpa	30 Mpa	20 Mpa	30 Mpa	25 Mpa
Flexural strength at 28 days	5 Mpa	7 Mpa	6 Mpa	>6 Mpa	2.5 Mpa	>6 Mpa	6 Mpa
Shrinkage	very low	very low	very low	low	low	Low	very low
Pumpable	✓	✓	✓	-	-	-	✓
TRAFFIC TYPES							
Medium Traffic	✓	✓	✓	✓	✓	✓	✓
Heavy Traffic	✓	✓	✓	✓	✓	✓	✓
Extra Heavy Traffic	-	-	-	-	-	-	-
COVERING OPTIONS							
Epoxy coating	-	-	-	✓	-	✓	-
PU coating	-	-	-	✓	-	✓	-
Self-leveling	✓	✓	✓	✓	✓	✓	✓
Decorative Flooring	✓	✓	✓	✓	-	✓	-
Tiles	✓	✓	✓	✓	✓	✓	✓
AVAILABLE IN							
KSA	✓	✓	✓	-	✓	✓	✓
UAE	✓	-	✓	✓	✓	✓	✓
Qatar	✓	-	✓	✓	✓	✓	✓
Oman	✓	-	✓	✓	✓	✓	✓
Lebanon	-	-	✓	✓	✓	✓	✓
Jordan	-	-	✓	✓	✓	✓	✓
Kuwait	✓	-	✓	✓	✓	✓	✓

The choice of the screed will be depending on several factors, such as the screed properties, application thickness, scope of use, the next floor layer (overlay) and of course the product availability.

Self-leveling product selector

	Smoothing compounds			Leveling compounds			
	weberfloor smooth FD	weberfloor level FH 25	weberfloor level FH 30	weberfloor 525 FD	weberfloor 535 FD	weberfloor 514 SL	weberfloor 515 PSC
PROPERTIES							
Application thickness	1-10 mm	2-10 mm	2-10 mm	2-30 mm	2-30 mm	2-30 mm	2-15 mm
Foot traffic	3- 4 hrs	8-10 hrs	4-6 hrs	3-4 hrs	3-4 hrs	12 hrs	12 hrs
Time to cover	12 to 24 hrs	24 to 48 hrs	24 to 48 hrs	24 hrs	24 hrs	24 to 48 hrs	24 to 48 hrs
Compressive strength at 28 days	>25 Mpa	>25 Mpa	>30 Mpa	>25 Mpa	> 35 Mpa	25 Mpa	35 Mpa
Flexural strength at 28 days	6 Mpa	>6 Mpa	>6 Mpa	>6 Mpa	>10 Mpa	6 Mpa	7 Mpa
Shrinkage	Low	Low	Low	Low	Low	Low	Low
Pumpable	✓	-	-	✓	✓	-	-
TRAFFIC TYPES							
Light Traffic	✓	✓	✓	✓	✓	✓	✓
Medium Traffic	✓	✓	✓	✓	✓	✓	✓
Heavy Traffic	-	-	-	✓	✓	✓	✓
COVERING OPTIONS							
Carpet & Textiles	✓	✓	✓	✓	✓	✓	✓
Parquet & Wood floor	✓	✓	✓	✓	✓	✓	✓
Vinyl & LVT	✓	✓	✓	✓	✓	✓	✓
Rubber floor	✓	✓	✓	✓	✓	✓	✓
Linoleum	✓	✓	✓	✓	✓	✓	✓
AVAILABLE IN							
KSA	✓	✓	✓	✓	✓	✓	✓
UAE	✓	-	✓	✓	✓	✓	✓
Qatar	✓	-	✓	✓	✓	✓	✓
Oman	✓	-	✓	✓	✓	✓	✓
Lebanon	-	-	-	-	-	✓	✓
Jordan	-	-	-	-	-	✓	✓
Kuwait	✓	-	✓	✓	✓	✓	✓


Covering adhesive product selector

	Vinyl	LVT Homogeneous	LVT Heterogenous	Rubber	PVC	Linoleum	Textile	Parquet	Wood
COVERING ADHESIVE									
weberfloor 4850 VR	✓	✓	✓	✓	✓				
weberfloor 4825 LT						✓	✓		
weberfloor 4832								✓	✓

The selection of the self-leveling and floor covering adhesive depends on several factors that align with the project requirements, substrate type and of course the final floor covering type.

Soundproof flooring systems

Acoustic under screed

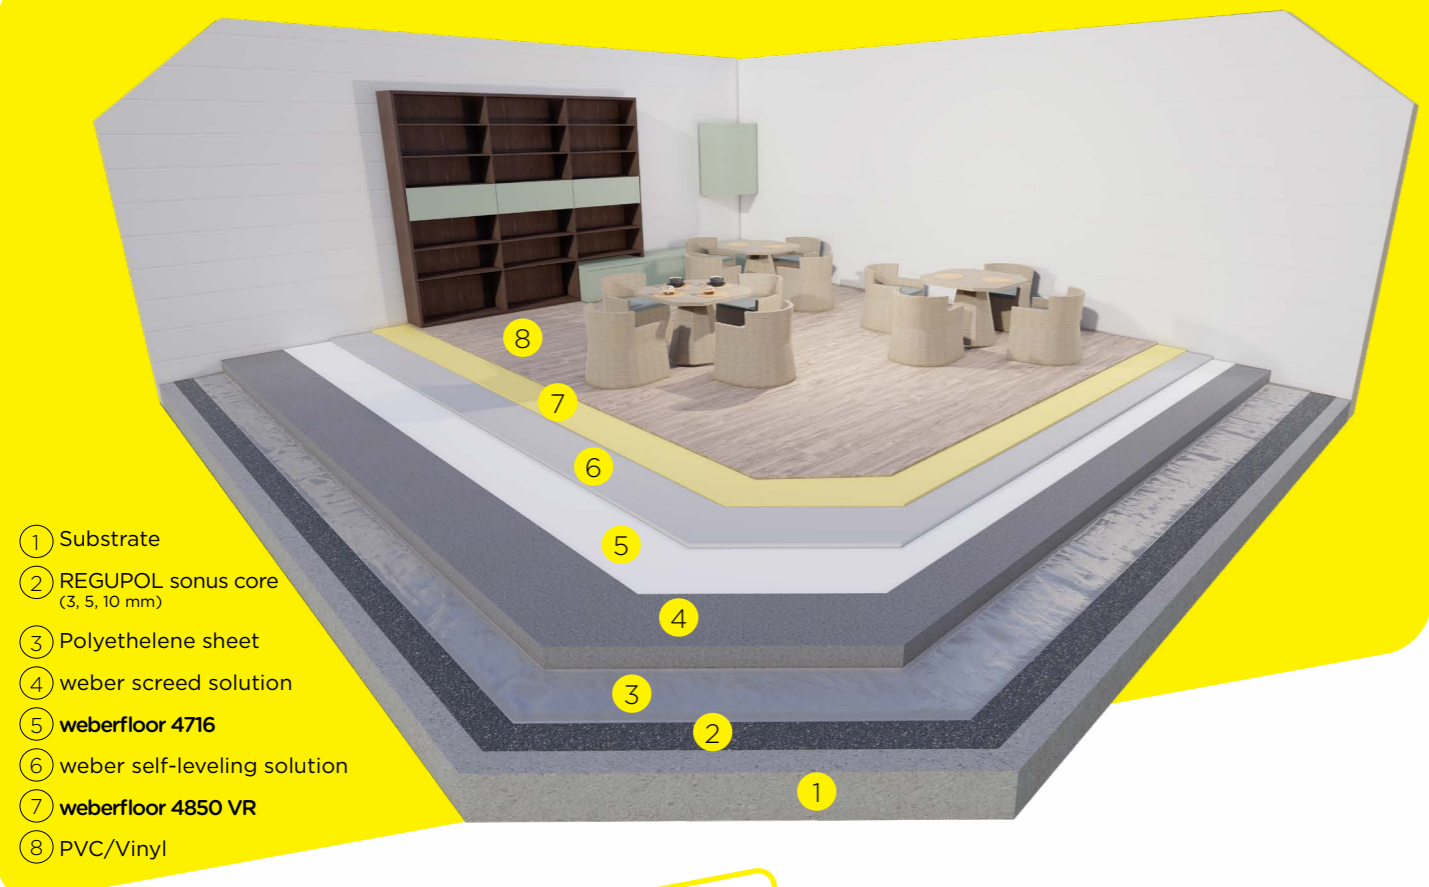

For a healthier living environment, boost your comfort with Weber flooring systems!

- Reduce anxiety
- Absorb vibrations
- Suppress noise

- Compatible layers
- Reduce disturbances
- Quieter environment



SOUND PROOFING



MACHINE APPLICATION



IDEAL UNDERLAYER



RAPID SET

Acoustic under screed product selector

Weber offers 4 main solutions for under screed application:

- **weberfloor acoustic US 22**
- **weberfloor acoustic US 23**
- **weberfloor acoustic US 25**
- **weberfloor acoustic US 30**

	Δ IIC	Acoustic Mat	weber screed options	If the final covering is a resilient floor (Vinyl, rubber, lenolium, carpet, etc..) weber self leveling options	weber covering adhesives options
weberfloor acoustic US 22	Up to 22 d.B	REGUPOL sonus core 3mm	Rapid drying screed (4 to 10 cm) weberfloor rapid/rapid 40	Fast drying self-leveling (1 to 10 mm) weberfloor smooth FD	Vinyl and rubber weberfloor 4850 VR
weberfloor acoustic US 23	Up to 23 d.B	REGUPOL sonus core 3mm	Fiber reinforced screed (4 to 8 cm) weberfloor 630 TSC/weberfloor 600 SCR	Fast hardening self-leveling (2 to 10 mm) weberfloor FH 25/FH 30	
weberfloor acoustic US 25	Up to 25 d.B	REGUPOL sonus core 5mm	Low density screed (4 to 8 cm) weberfloor 628 LD	Fast hardening self-leveling (2 to 15 mm) weberfloor 515 PSC	Textile and Lenolium weberfloor 4825 LT
weberfloor acoustic US 30	Up to 30 d.B	REGUPOL sonus core 10mm	High performance easy leveling screed (4 to 10 cm) weberfloor easy 625	Fast hardening self-leveling (2 to 30 mm) weberfloor 514 SL	Wood floor/ Parquet weberfloor 4832
				Fast drying self leveling (2 to 30 mm) weberfloor 525 FD/weberfloor 535 FD	

The impact sound reduction (Δ IIC) is influenced by factors like the floor-ceiling assembly, the thickness and density of the underlay.



For selecting the right soundproof flooring system, please refer to the product selector on page 19.

Soundproof flooring systems

Acoustic under tiles



Create a quieter, more peaceful space with Weber flooring systems, designed for superior noise reduction!

- Elevate acoustic comfort
- Practical application
- Reduce disturbances
- Reduce anxiety
- Quieter environment
- Absorb sound vibrations
- Complete system
- Lower stress levels
- Reduce noise transmission
- Fully compatible layers



PUMP APPLICATION



DURABILITY




RAPID SET



SOUND PROOFING



HIGH GRAB



IDEAL UNDERLAYER

Acoustic under tiles product selector

Weber offers 4 main solutions for under tiles application:

- weberfloor acoustic UTL 22
- weberfloor acoustic UTM 22
- weberfloor acoustic UTH 25
- weberfloor acoustic UTEH 25


System	Traffic type	ΔIIC	weber screed options	weber adhesive under mat	Acoustic mat	weber adhesive under tiles	Tile grout	Tiles type	Avr. thickness
weberfloor acoustic UTL 22	Light	Up to 22 dB	Rapid drying screed (2 to 10 cm) weberfloor rapid/rapid 40	webercol pro	REGUPOL sonus core 3 mm	webercol pro	weberjoint	Porcelain	45 mm
weberfloor acoustic UTM 22	Moderate	Up to 22 dB	Fiber reinforced screed (3 to 8 cm) weberfloor 630 TSC/ weberfloor 600 SCR	webercol pro	REGUPOL sonus core 3 mm	webercol pro + latex	weberjoint	Porcelain	55 mm
weberfloor acoustic UTH 25	Heavy	Up to 25 dB	Low density screed (3 to 8 cm) weberfloor 628 LD	webercol pro	REGUPOL sonus core 5 mm	webercol pro	weberjoint deco	Porcelain	45 mm
weberfloor acoustic UTEH 25	Extra heavy	Up to 25 dB	High performance easy leveling screed (2 to 10 cm) weberfloor easy 625	webercol pro	REGUPOL sonus core 5 mm	webercol pro + latex	weberrepx easy	Porcelain	60 mm
	Extra heavy	Up to 25 dB		weberfloor 4850 VR	REGUPOL sonus core 5 mm	webercol plus	weberjoint deco	Marble	60 mm

The impact sound reduction (ΔIIC) is influenced by factors like the floor-ceiling assembly, the thickness and density of the underlay.



For selecting the right soundproof flooring system, please refer to the product selector on page 21.

Thermal insulation system

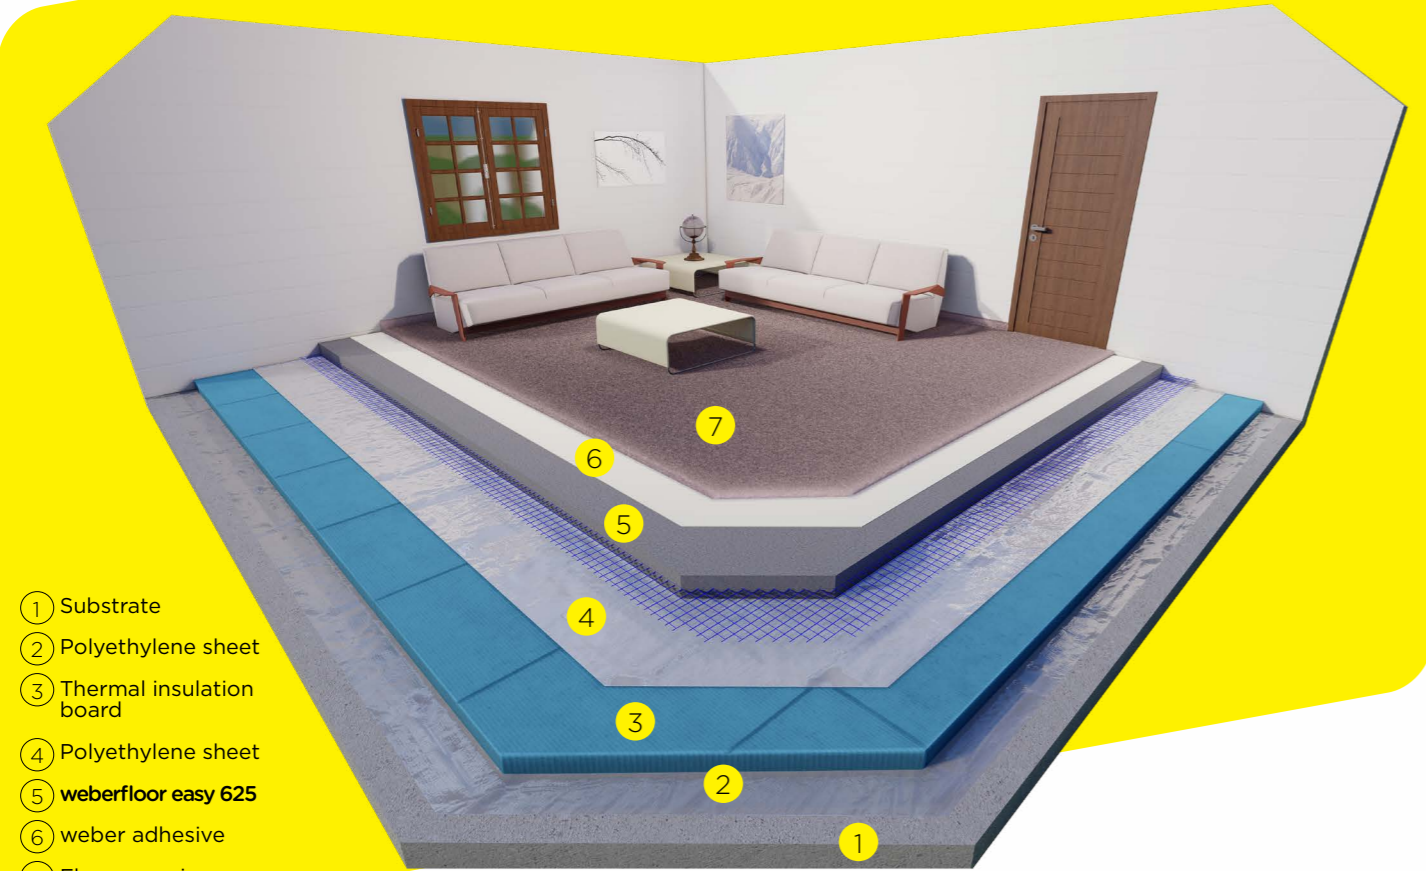

- ① Substrate
- ② Polyethylene sheet
- ③ Thermal insulation board
- ④ Polyethylene sheet
- ⑤ weberfloor easy 625
- ⑥ weber adhesive
- ⑦ Floor covering

Embrace warmth and comfort all year round with innovative thermal flooring systems!

- 2 in 1 product
- Fine finish
- Highly flowable
- Cost-effective
- Pumpable
- Very low shrinkage
- Easy leveling
- Fast curing



LEVELING MORTARS



LOW VOC



MACHINE APPLICATION



EASY TO APPLY



ECONOMIC



DURABILITY

Heated flooring system




- ① Substrate
- ② Polyethylene sheet
- ③ XPS or EPS board
- ④ Heating pipes
- ⑤ weberfloor anhydrite/4990-L
- ⑥ weberprim EP 2K + silica sand
- ⑦ webercol flex
- ⑧ Tile grout
- ⑨ Marble tiles

Warmth beneath your feet!
Comfort and efficiency combined.


- Low application thickness
- Superior leveling capability
- Remarkable heat distribution
- Excellent thermal conductivity
- High strength
- High flowability
- Pumpable
- Very low shrinking



FLOOR HEATING AFTER 7 DAYS



FLOORING THICKNESS



IDEAL UNDERLAYER



RAPID SET



DURABILITY



MACHINE APPLICATION

Decorative flooring systems weber euroflor Design



Transform your space with stunning decorative flooring, where style meets functionality.

- Low carbon footprint
- High abrasion resistant
- Self-levelling
- Seamless
- Stain resistant
- Indoor & outdoor
- Limitless designs
- UV stable



Patterns


weber euroflor Design *colour options*

weber euroflor Design is available in countless colours and design possibilities.

Mix and match any colours with any designs or choose your own!



Decorative flooring systems weber euroflor Terrazzo

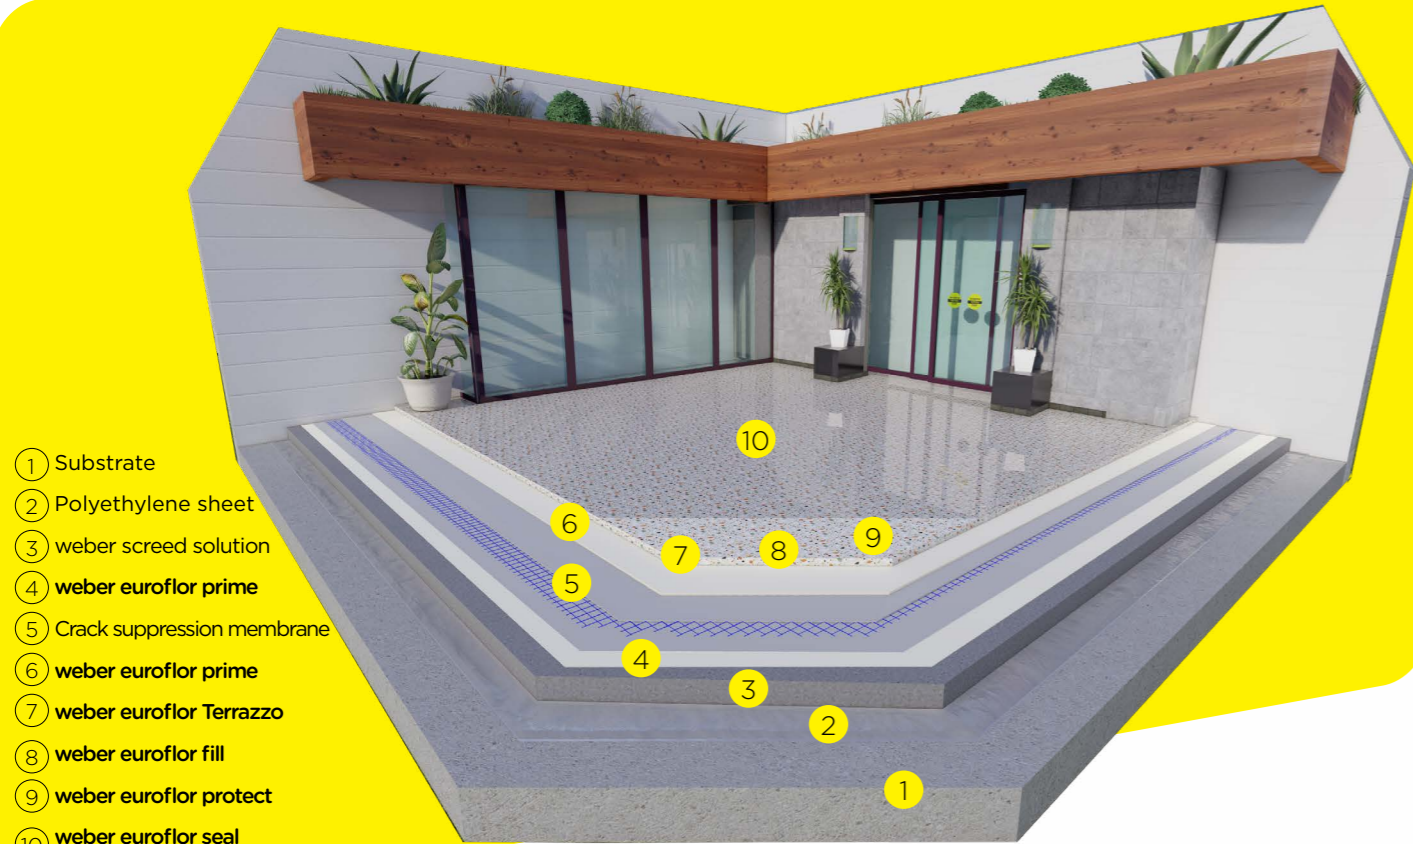

- ① Substrate
- ② Polyethylene sheet
- ③ weber screed solution
- ④ weber euroflor prime
- ⑤ Crack suppression membrane
- ⑥ weber euroflor prime
- ⑦ weber euroflor Terrazzo
- ⑧ weber euroflor fill
- ⑨ weber euroflor protect
- ⑩ weber euroflor seal

Experience eco-friendly elegance with sustainable terrazzo, where sustainability meets style!


- Seamless
- Slip resistant
- Stain resistant
- Rapid hardenedning
- UV stable
- Tension relieved
- Chemicals resistant
- Limitless designs



LONG LIFE COLOR



ENVIRONMENTALLY FRIENDLY



SURFACE WITHOUT JOINTS



IMPACT RESISTANT



CHEMICAL RESISTANT




WATER VAPOR BARRIER

Patterns

weber euroflor Terrazzo colour options

weber euroflor Terrazzo range offers exemplary coloured surfaces and mixtures of different decorative grains that show you the varied and creative possibilities arising through different combinations of the system products.

Let the following illustrations inspire you to develop your very own creation in **weber euroflor Terrazzo** look.

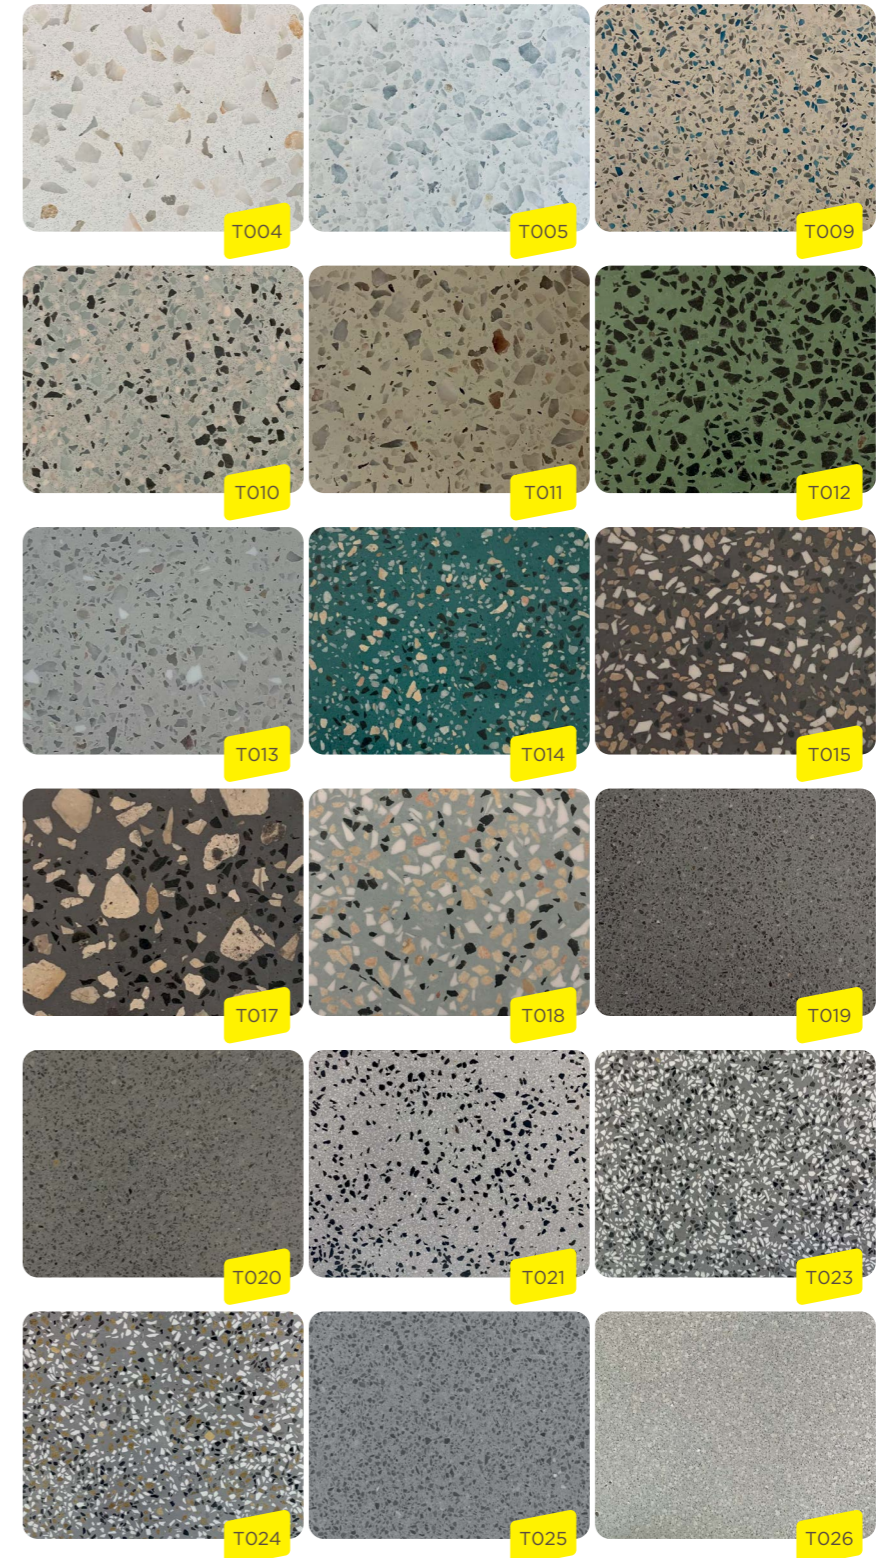

Stamped concrete system



- ① Substrate
- ② Polyethylene sheet
- ③ Steel rebars
- ④ Wet screed
- ⑤ weberfloor 440 SC
- ⑥ weberfloor 340 RLS
- ⑦ weberfloor sil 240 SB/sil 241 WB

Texture your space with durable and stylish stamped concrete. Beauty that lasts!

- Durability
- Cost effective
- Quick Installation
- Aesthetic Versatility
- Low Maintenance
- Customization



TRAFFIC RESISTANT




LONG LIFE COLOR



UV RESISTANCE



EASY TO APPLY



INTERIOR EXTERIOR



DURABILITY

Patterns

Stamped concrete colour options

Convert your outdoor space with the timeless elegance of stamped concrete patterns



Cobblestone - Random Interlocking



Random Stone



Wood Planks



European Fan



Sand Stone - Random Interlocking



London Cobble

Color Chart References

Silver



Dark Grey



Black



Beige



Terracotta



Red Brick



Blue



Green



*For color references and additional information, please contact our sales representative.

TECHNICAL AND INDUSTRIAL FLOORING SOLUTIONS


Ideal solutions for manufacturing plants, warehouses, and more!

Industrial flooring systems are built to endure tough conditions, providing durability and safety in high-traffic areas, making them ideal for manufacturing plants and warehouses.

Proper surface preparation is crucial for a successful application!

Substrates should be/has:

- At least 28 days old.
- Clean, dry, and free from adhesion-reducing substances.
- A moisture content <5%.
- A surface tensile adhesion strength >1.5MPa.
- Been repaired with a concrete patching compound such as **weberfloor epopatch** or **weberfloor epolevel**, etc..

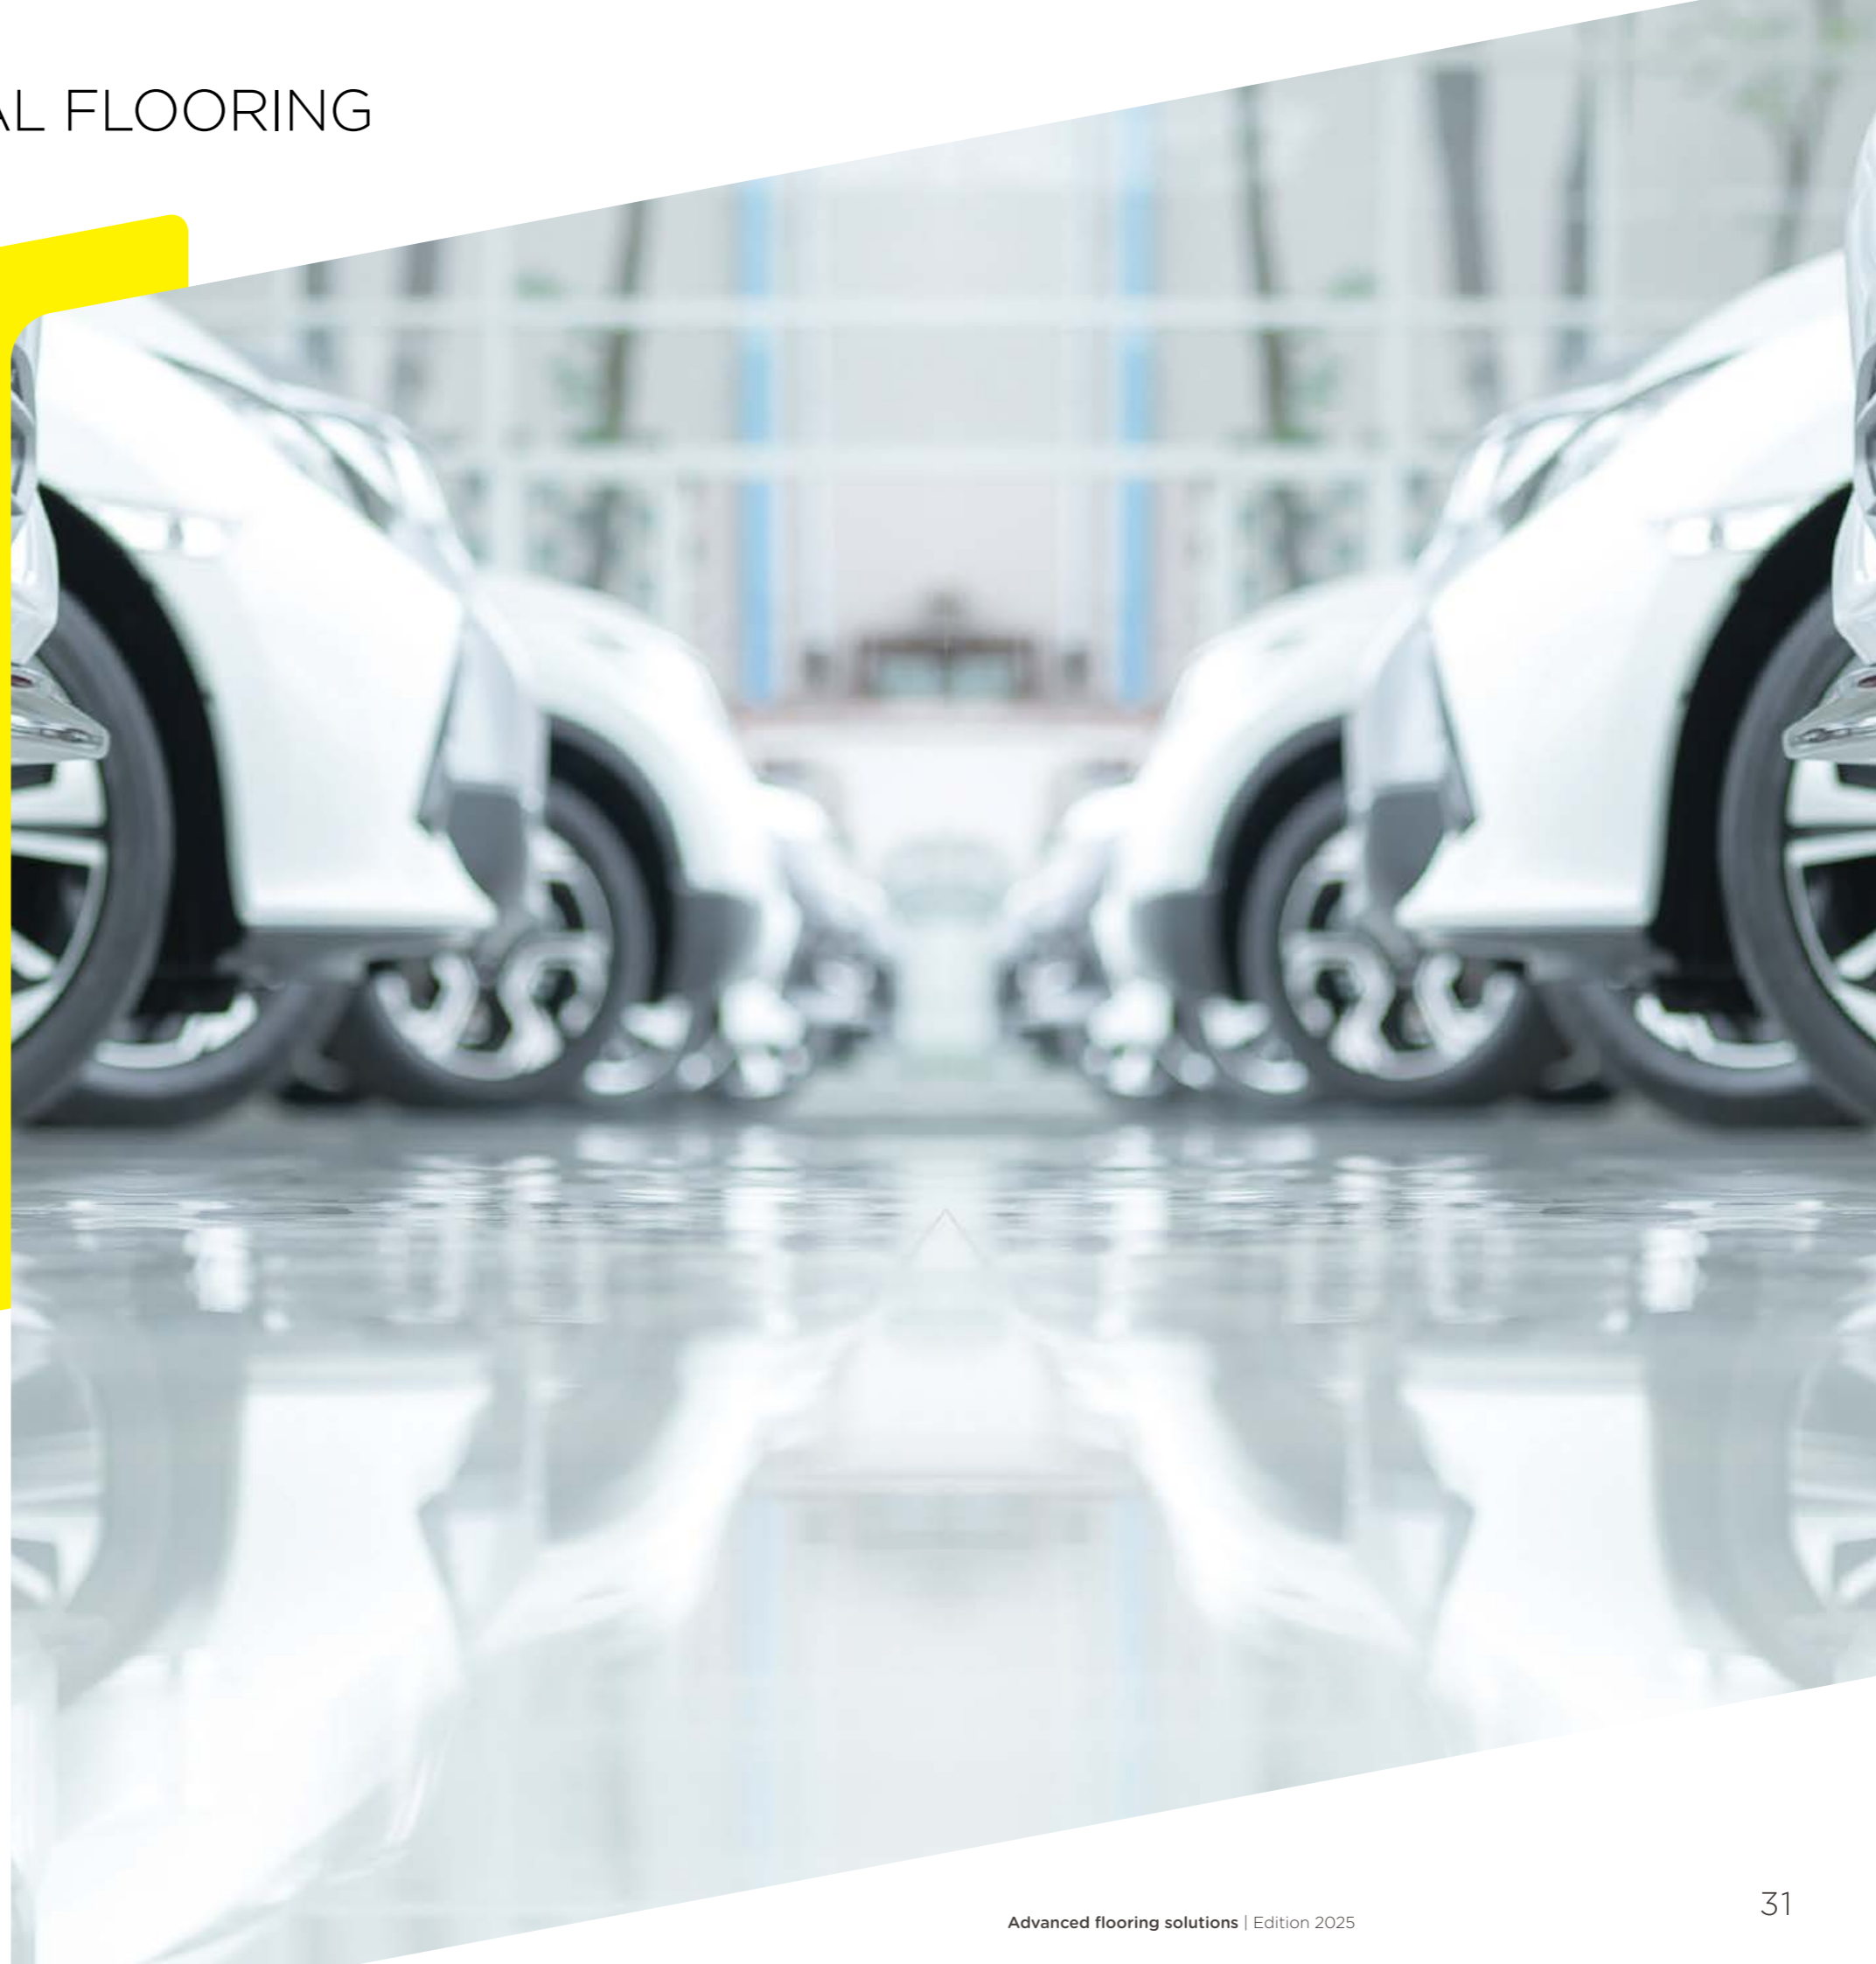



P.35

P.36

P.38

P.37

P.40

P.34

P.34 Outdoor floor coating system

P.38 Concrete surface hardeners system


P.35 Car park decking system

P.40 Cement based screed system

P.36 Indoor floor coating system

P.37 Colored epoxy-based screed system

Outdoor floor coating system weberfloor UV guard

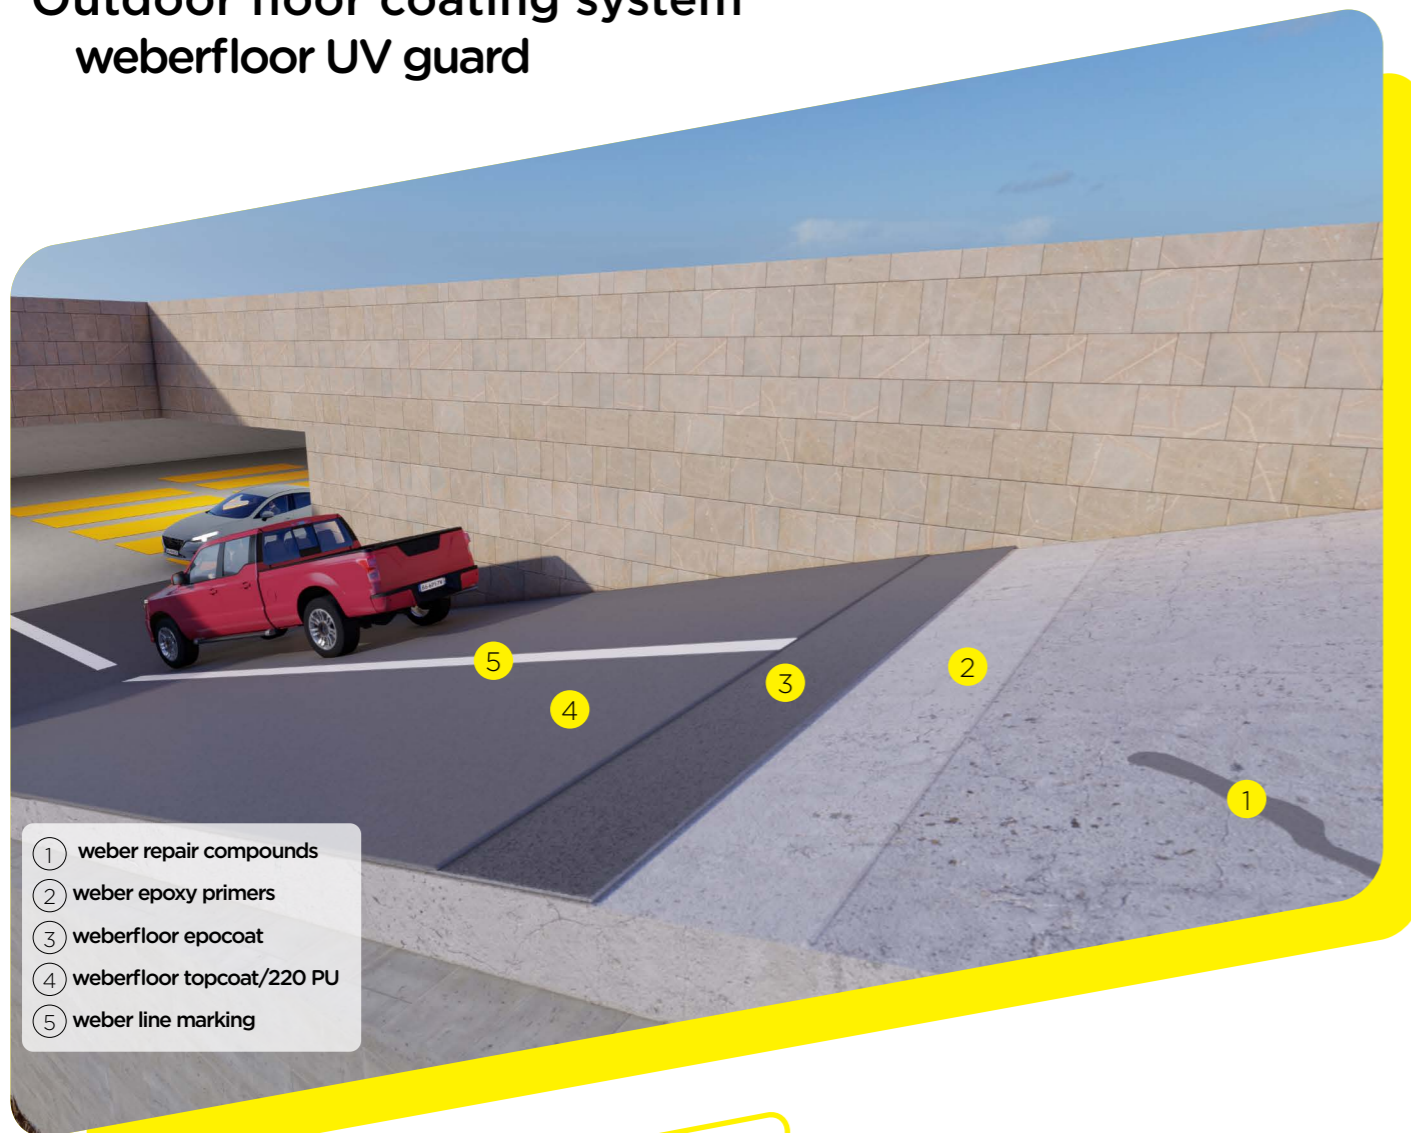

- ① weber repair compounds
- ② weber epoxy primers
- ③ weberfloor epocoat
- ④ weberfloor topcoat/220 PU
- ⑤ weber line marking

Protect your floors with **weberfloor UV Guard** - engineered for durability against UV radiations, heavy traffic, and mechanical wear.

- UV stable
- Heavy duty
- Abrasion resistant
- Self-smoothing
- High wear
- Chemical resistant
- Odorless coating
- Outdoor application



DRIP FREE



UV STABLE



DURABILITY



TRAFFIC RESISTANT




LONG LIFE COLOR



ANTI SLIP

Car park deck system weberfloor deckarmor

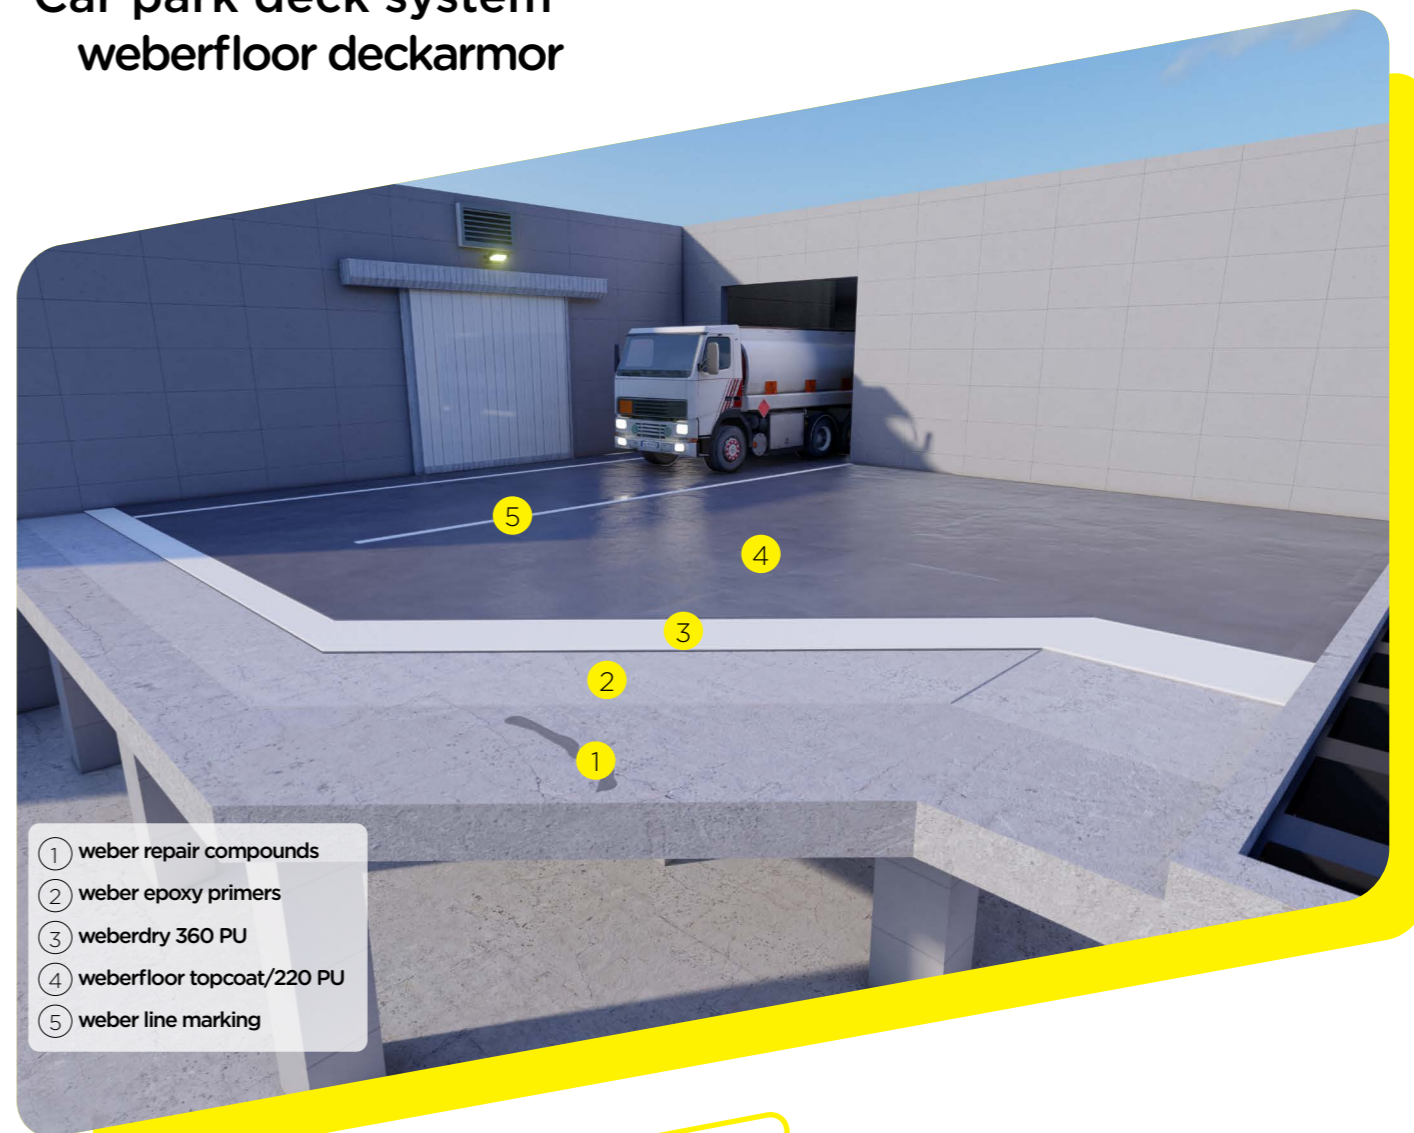

- ① weber repair compounds
- ② weber epoxy primers
- ③ weberdry 360 PU
- ④ weberfloor topcoat/220 PU
- ⑤ weber line marking

Shield your deck with **weberfloor deckarmor**, the ultimate barrier against water penetration and crack bridging!

- Waterproof
- High wear
- Heavy duty
- Self-smoothing product
- Outdoor application
- High elasticity
- Abrasion resistant
- UV stable



TRAFFIC RESISTANT



DURABILITY



EASY TO CLEAN



EASY TO MIX



LONG LIFE COLOR




WATERPROOFING & ROOFING

weberfloor UV guard is applicable with silica sand to provide an anti-skid surface for enhanced safety, or without sand for a smoother finish. Available in different colors.

weberfloor deckarmor is available in application thicknesses ranging from 800 to 1600 microns. Available in different colors.

Indoor floor coating weberfloor toughcoat

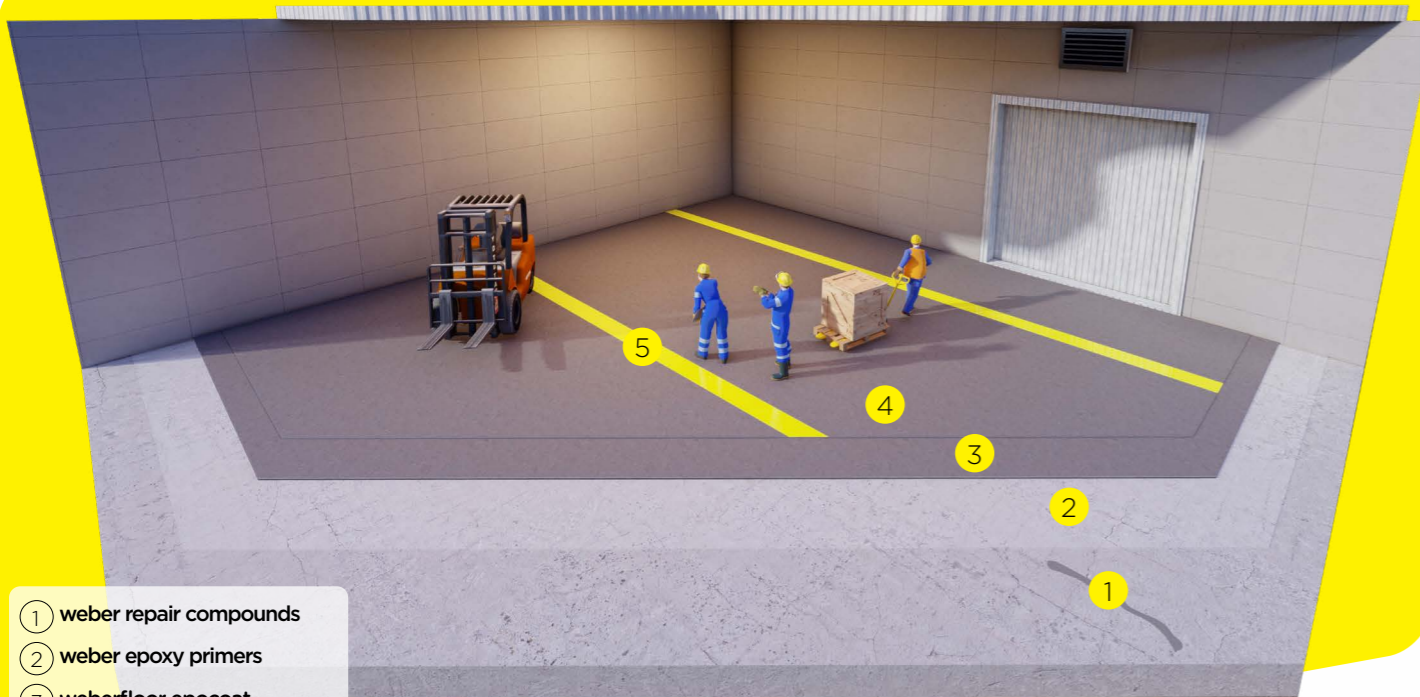

- ① weber repair compounds
- ② weber epoxy primers
- ③ weberfloor epocoat
- ④ weberfloor epocoat
- ⑤ weber line marking

Strengthen your floors with **weberfloor toughcoat**, built to withstand heavy loads and resist oils, greases, and chemicals for enduring durability.

- Cost effective
- Oil resistant
- Fuel-resistant
- Heavy duty
- Odorless
- Lubricants resistant
- Acids resistant
- Abrasion resistant



weberfloor toughcoat is applicable with silica sand to provide an anti-skid surface for enhanced safety, or without sand for a smoother finish. Available in different colors.



ANTI BACTERIAL



CHEMICAL RESISTANT



LONG LIFE COLOR



NO SMELL




ROLLER



EASY TO CLEAN

Colored epoxy self-leveling system weberfloor colorshield

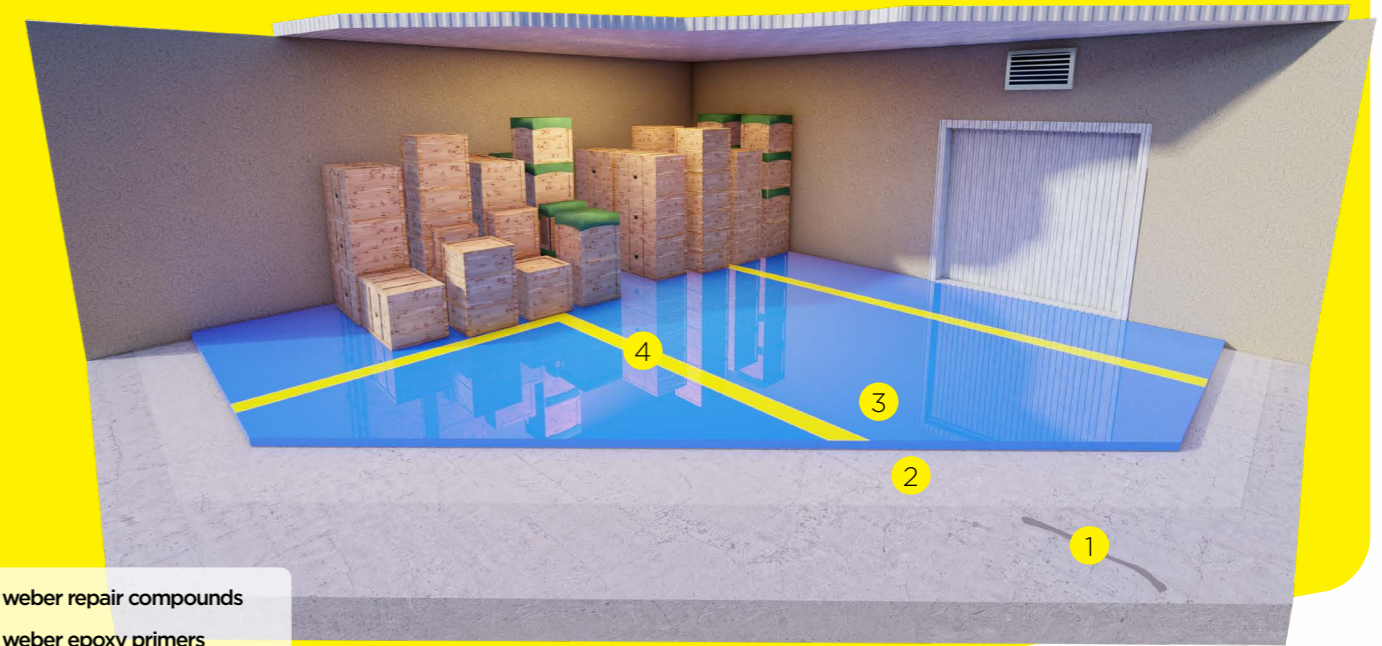

- ① weber repair compounds
- ② weber epoxy primers
- ③ weberfloor epopark
- ④ weber line marking

Discover the seamless and visually stunning solution, **weberfloor colorshield**, designed for extra heavy traffic and demanding environments!

- High Durability
- Abrasion resistant
- Impact Resistant
- High Load Capacity
- Seamless Surface
- Aesthetic Appeal
- High flexural strength
- Fast installation



Available in different colors.



ROBUST



HIGH GRAB



ANTI BACTERIAL



CHEMICAL RESISTANT



COMPRESSIVE STRENGTH



LONG LIFE COLOR

Concrete floor hardeners weberfloor hardtop



- ① weber repair compounds
- ② Freshly placed concrete
- ③ weberfloor hardtop 75

Strengthen your concrete surfaces with **weberfloor hardtop** - formulated for superior wear and abrasion resistance, delivering a durable and impact-resistant finish.

- Dust inhibitor
- High abrasion
- Excellent compressive
- Easy to apply
- Homogeneous blend
- Excellent Flexural



DUST INHIBITOR



DURABILITY




ECONOMIC



FLOOR CARE



COMPRESSIVE STRENGTH



TRAFFIC RESISTANT


Concrete floor hardeners product selector

Product	Form	Color	Dust inhibitor	Anti-marks	Prevent moisture penetration	Traffic type
weberfloor hardtop 45	Powder	Gray	✓			Light Medium Heavy
weberfloor hardtop 75	Powder	Gray	✓			Medium Heavy Extra heavy
weberfloor 400 BA	Powder	Gray	✓			Light Medium Heavy
weberfloor 410 QS	Powder	Gray	✓			Light Medium Heavy
weberfloor 420 HP	Powder	Gray	✓			Light Medium Heavy
weberfloor 440 SC	Powder	Several colors	✓			Light Medium Heavy
weberfloor hardex	Liquid (epoxy based)	Transparent	✓			Medium Heavy Extra heavy
weberfloor 255 SC	Liquid (water based)	Transparent	✓			Light Medium Heavy

For more details, please refer to the system product's data sheets and application methods statement.



Heavy-duty cement-based screed weberfloor heavyguard

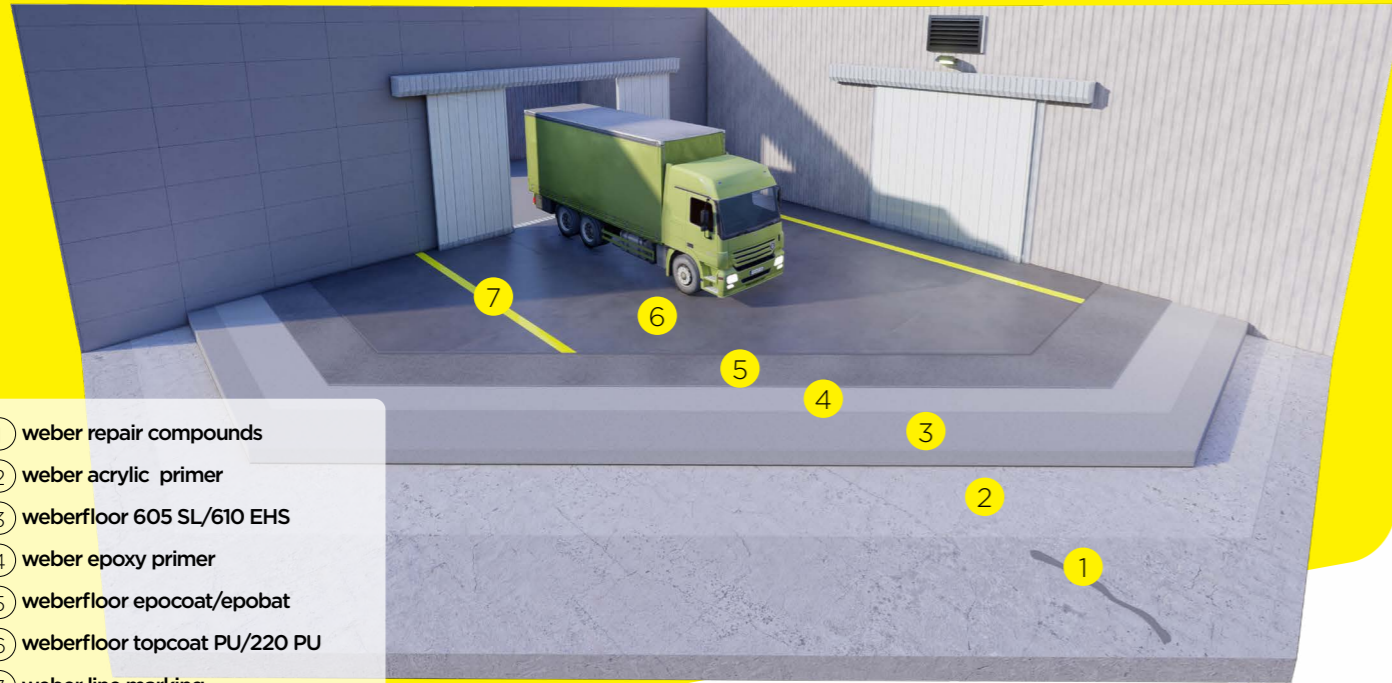


- ① weber repair compounds
- ② weber acrylic primer
- ③ weberfloor 605 SL/610 EHS
- ④ weber epoxy primer
- ⑤ weberfloor epocoat/epobat
- ⑥ weberfloor topcoat PU/220 PU
- ⑦ weber line marking

Reinforce your foundation with **weberfloor heavyguard**, a heavy-duty, cement-based screed for strong, durable, and level surfaces in tough environments.

- Outdoor application
- High chemical resistance
- Ultimate strength
- High Load
- Excellent abrasion
- High flowability
- Self-leveling
- Crack Prevention



weberfloor heavyguard is a moisture-free, eliminating the need for water curing and significantly reducing the critical covering application period. Available in different colors.



**LEVELING
MORTARS**



**COMPRESSIVE
STRENGTH**



**TRAFFIC
RESISTANT**



ROBUST



UV STABLE



HIGH GRAB

PRODUCTS DATA

Epoxy floor coating systems

Pre-weighed colored resin and hardener components that provide a hard wearing and abrasion resistant floor finish for basements, warehouses, industrial factories, ground floor car parks and traffic decks.



Polyurethane floor coating systems

High build polyurethane products with excellent resistance to UV and atmospheric exposure, to a splash of mineral and vegetable oils, white spirit, paraffin and aliphatic petroleum products.




Self-levelling floor compounds and screeds

High-performance easy leveling, pumpable screed along with fast drying self-leveling and smoothing compound having high performance in terms of low shrinkage, adhesion, strength, and segregation resistance.



Stamped concrete system

Patterned and/or textured or embossed concrete to resemble brick, slate, flagstone, stone, tile, wood. It is commonly used for patios, sidewalks, driveways, pool decks, and interior flooring.

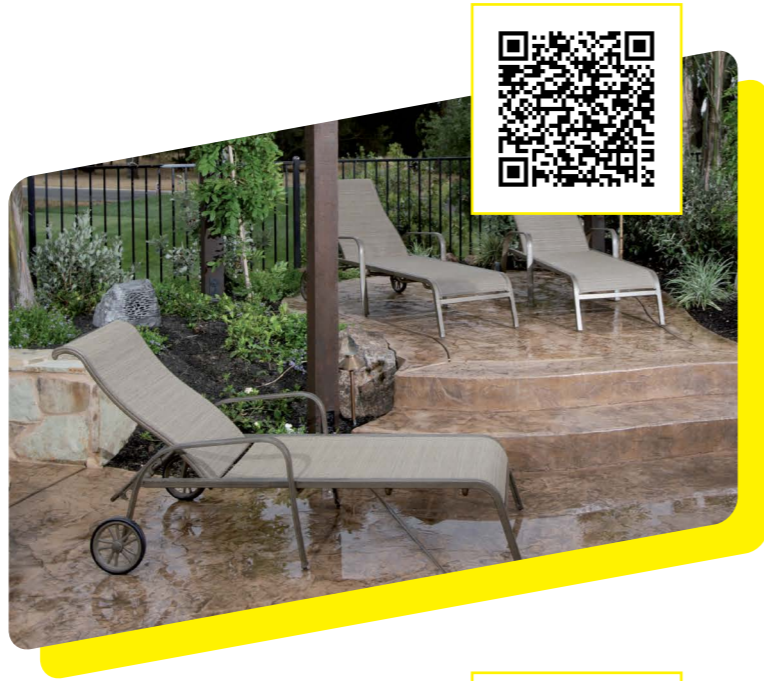

Surface hardeners and sealers

Ready to use surface hardener for concrete made with selected aggregates (Silica, Basalt), cement and additives. It is an economical floor hardener recommended for internal and external use with high abrasion resistance and strength.



Decorative Flooring Systems

Floors are a key element of any building design, weber euroflor gives the floor of your building a distinctive touch that expresses your delicate taste...

- weber euroflor Design
- weber euroflor Terrazzo



LEBANON T +961 9 790 920/1/2/3 - M +961 3 700 892/3 - F +961 9 790 924

UAE

Abu Dhabi Branch T +971 2 550 9994 - F +971 2 550 9449

Dubai Branch T +971 4 347 2640 - F +971 4 340 3420

KSA

Jeddah T +966 12 668 3295 / +966 12 261 2722 - F +966 12 668 1498

Riyadh T +966 12 668 3295 / +966 12 261 2722 - F +966 12 668 1498

EGYPT Hotline 15802 - T +20 238274646

JORDAN T +962 6 420 0417 - F +962 6 420 0418

QATAR T +974 4442 3816 - F +974 4442 5149

KUWAIT T +965 2 571 6404 / +965 2 571 0397 - F +965 2 571 2721

OMAN T +968 24 21 83 61 - F +968 24 21 83 62

Visit our website



@Saint-Gobain Weber Middle East



@Sodamco weber