



Infrastructure Solutions

Weber Worldwide

 10,000 people

 in 61 countries worldwide

 supported by almost 200 production units

We care about building better for people and the planet by offering solutions that deliver sustainability and performance to mortars customers

Weber Middle East

Sodamco was founded in 1984 and was integrated in Saint-Gobain Weber in 2012.

 more than 800 people

 present in 10 countries in the Middle East

 15 production units

Lebanon • UAE • Qatar • KSA • Jordan • Kuwait • Oman • Egypt • Iraq • Türkiye



Our 4 promises

Customer proximity

We commit, beyond our local footprint, to be **always by your side** as your **reliable, expert business partner**



Innovative solutions

We commit to constantly **anticipate your needs** and bring **added value solutions**



Performance

We commit to **respond to your challenges** by bringing you **trusted solutions** which offer productivity, financial benefits and quality finish, delivering the expected performance



Sustainability

We commit to care about people by making **installation and indoor environments more comfortable and safer**, and to care for the planet by **reducing buildings' environmental impacts**



index

INTRODUCTION

Welcome to our infrastructure brochure, where we invite you to discover the solutions we offer and develop to meet the evolving needs of our clients. Weber is a Saint-Gobain brand that cares about building better for people and the planet. It designs, manufactures and markets different solutions for façade, tiling, flooring, waterproofing, roofing, masonry mortars, plastering mortars and construction chemicals.

As the region continues to evolve and expand, the demand for innovative infrastructure solutions has never been greater. In this dynamic construction landscape, where innovation meets opportunity, infrastructure stands as the backbone of progress. At weber we stand ready and proud to be at the forefront of shaping the future with our range of infrastructure solutions.

At the heart of our infrastructure solutions lie a commitment to reliability, sustainability, and safety. We prioritize the well-being of our employees, customers, and the communities we serve, implementing rigorous standards and protocols to uphold the highest levels of quality and compliance.

In this brochure, you will explore our comprehensive range of infrastructure solutions designed to meet the unique challenges and opportunities of our region.




01 BRIDGES



02 TUNNELS



03 CAR PARK & ROADS

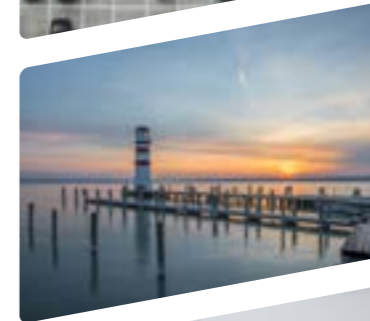

04 MARINE




05 AIRPORTS





06 RAILWAY STATIONS


Bridges

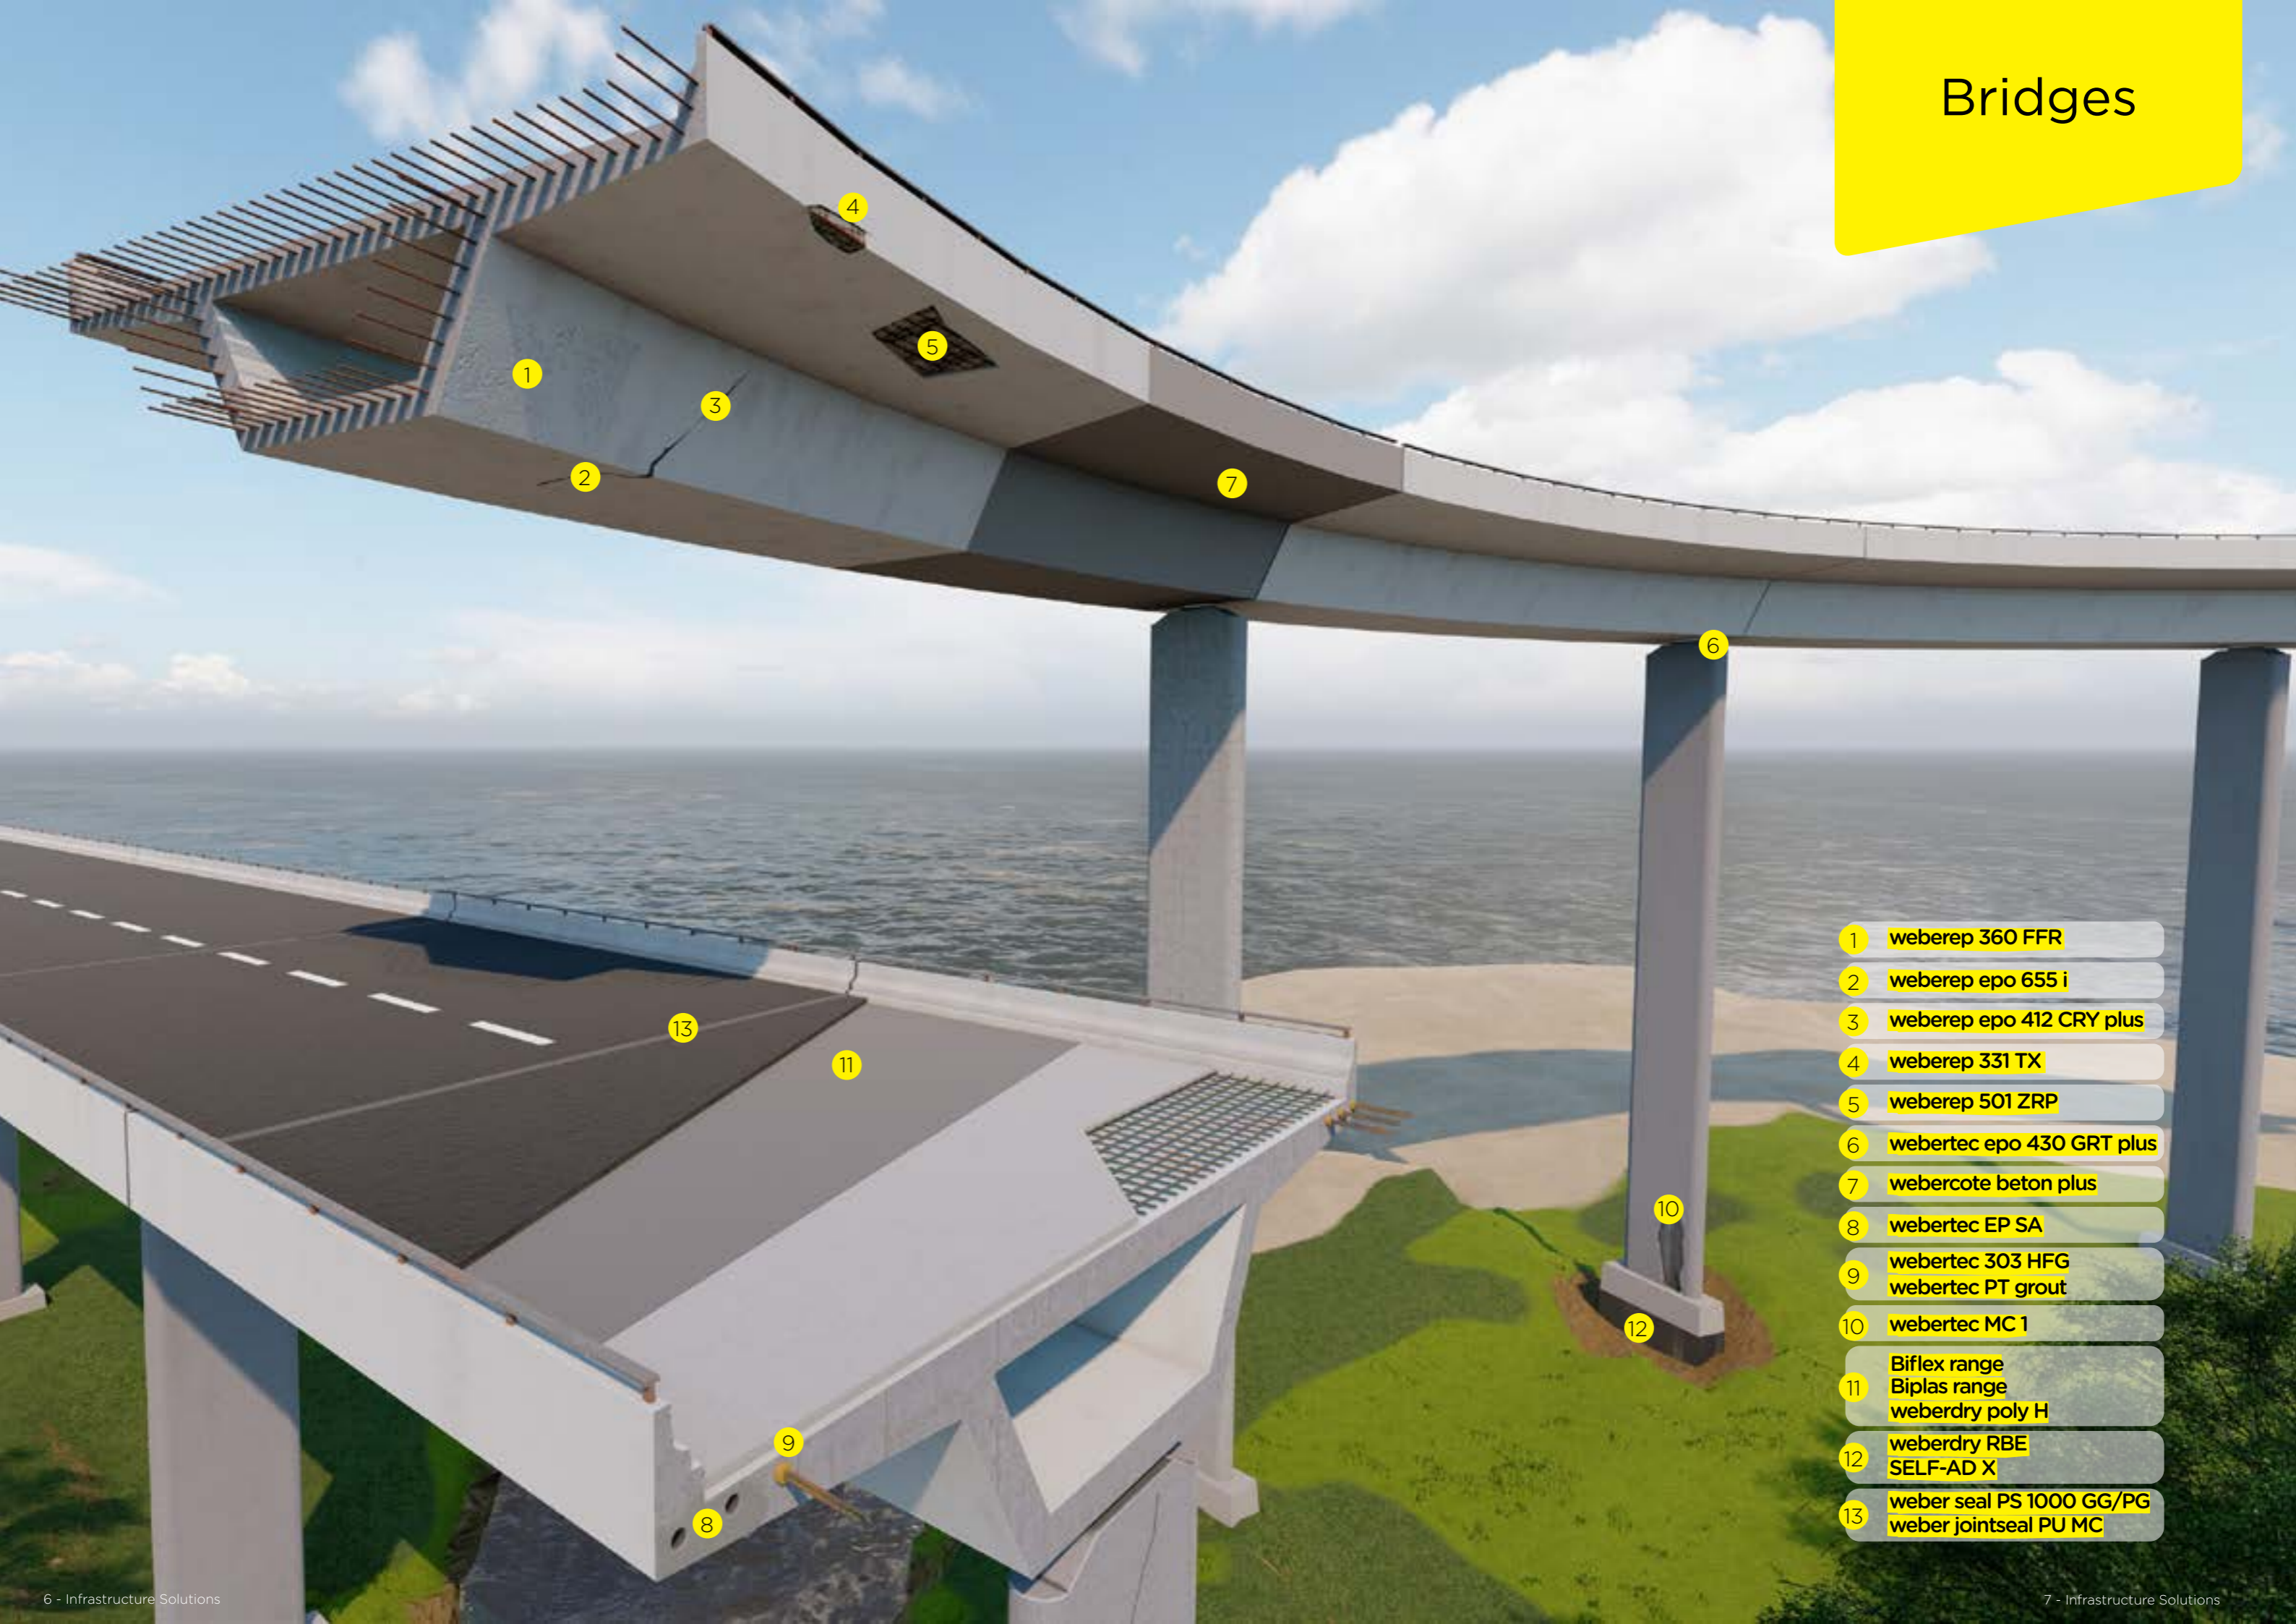

- 1 weberrep 360 FFR
- 2 weberrep epo 655 i
- 3 weberrep epo 412 CRY plus
- 4 weberrep 331 TX
- 5 weberrep 501 ZRP
- 6 webertec epo 430 GRT plus
- 7 webercote beton plus
- 8 webertec EP SA
- 9 webertec 303 HFG
webertec PT grout
- 10 webertec MC 1
- 11 Biflex range
Biplas range
weberdry poly H
- 12 weberdry RBE
SELF-AD X
- 13 weber seal PS 1000 GG/PG
weber jointseal PU MC

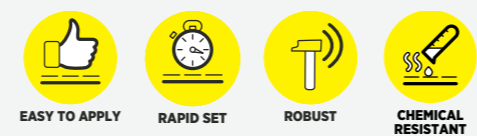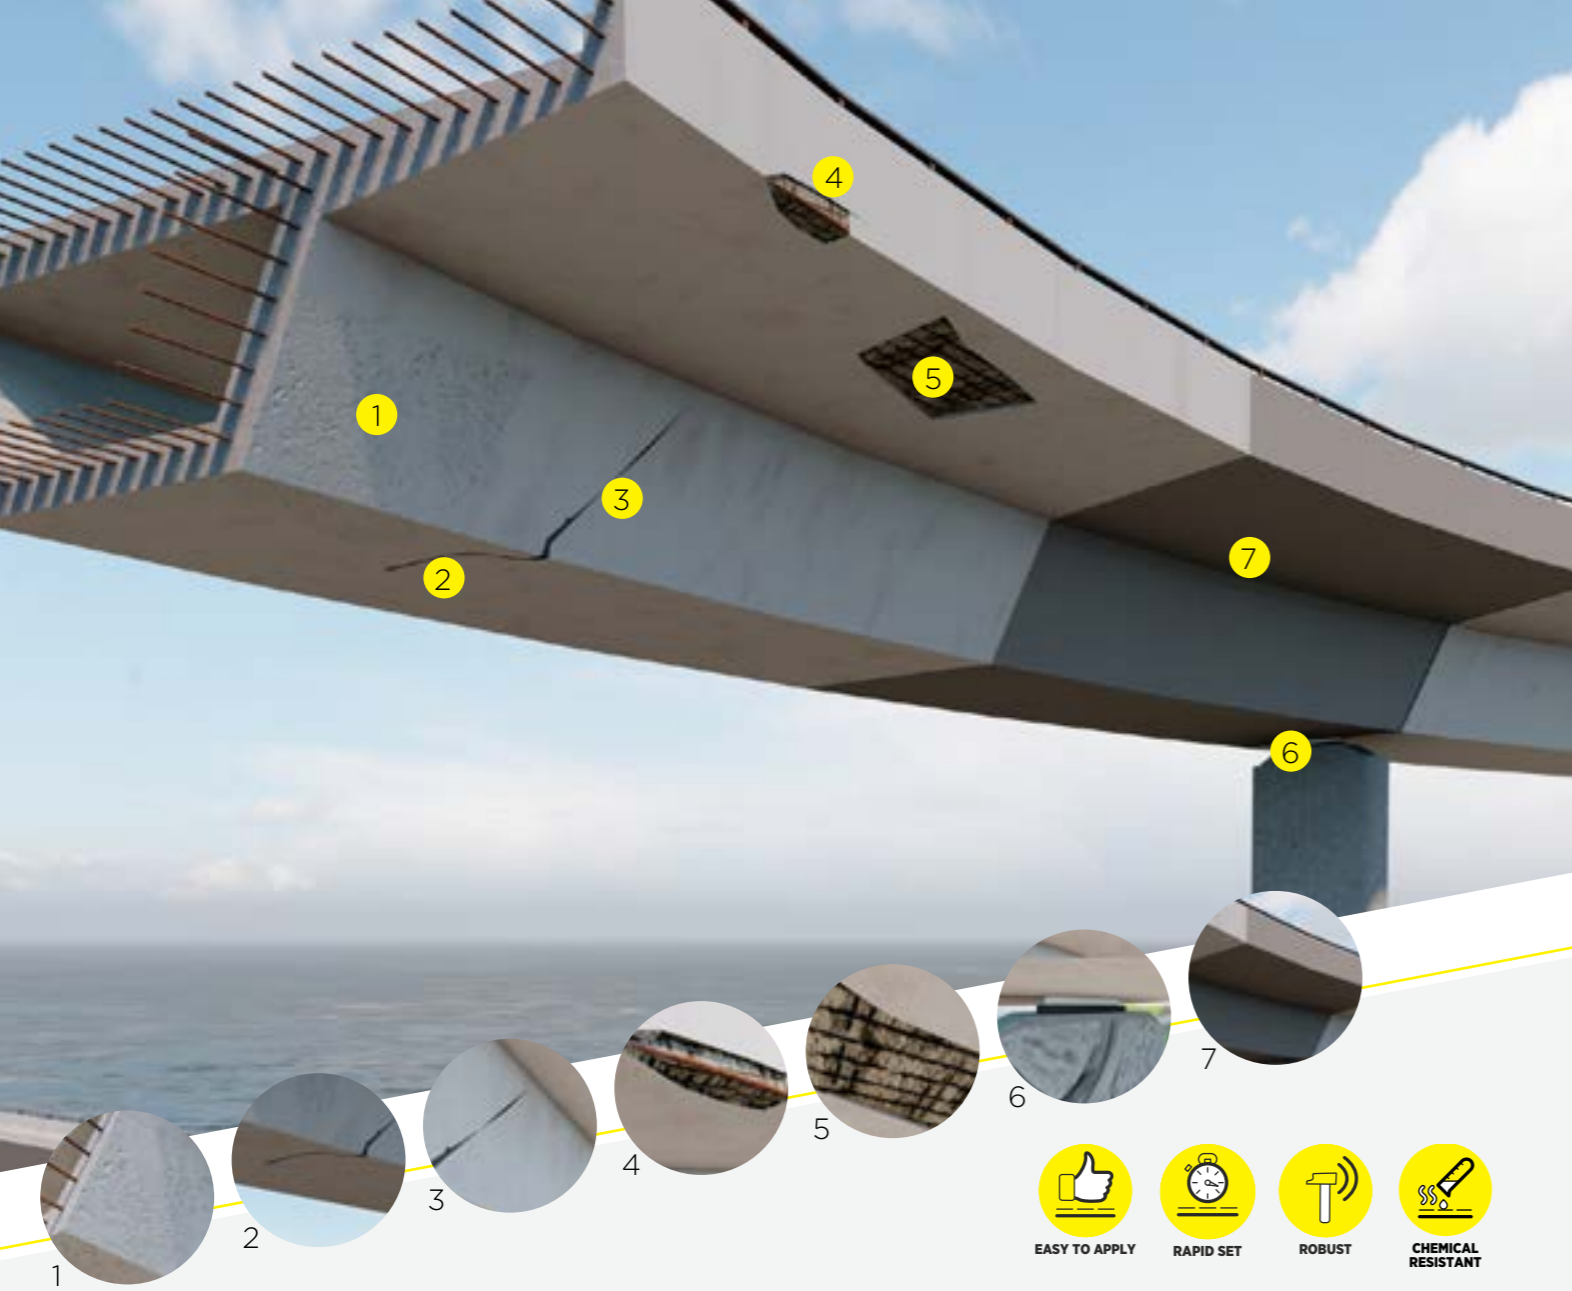

Application	Concrete repair & anchoring	Description	CS	FS	Thickness
1	weberep 360 FFR	Pre-mixed cementitious filler for fair face repair	> 15MPa	> 4MPa	up to 3mm
2	weberep epo 655 i	very low viscosity epoxy injection resin	75MPa		
3	weberep epo 412 CRY plus	High strength, thixotropic epoxy patching and bonding paste	70MPa	30MPa	up to 3mm
4	weberep 331 TX	Non-shrink thixotropic repair mortar with fiber	60MPa	7MPa	up to 50mm per coat
5	weberep 501 ZRP	Heavy duty anti-corrosive zinc-rich phosphate primer			Up to 190 microns WFT/coat
Application	Grouting & bedding	Description	CS	FS	Thickness
6	webertec epo 430 GRT plus	Free flowing high strength epoxy grout	100MPa	30MPa	Up to 450mm
Application	Protective coating	Description	Pull of strength	Crack bridging	Thickness
7	webercote beton plus	Protective anti-carbonation coating for concrete	> 2MPa	> 2mm	WFT: 300-350 microns/coat

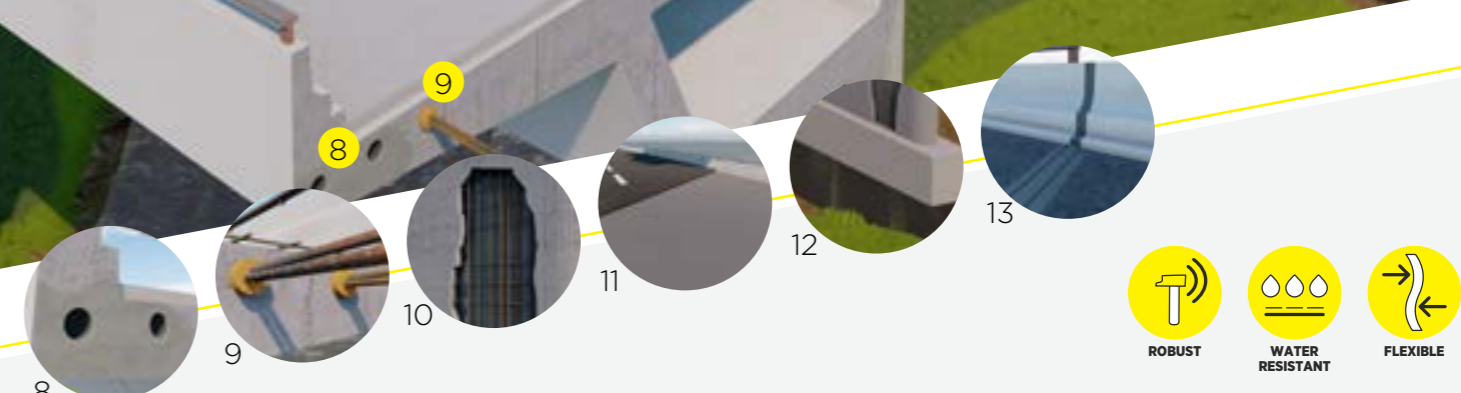

Application	Grouting & bedding	Description	CS	Expansion	Thickness
8	webertec EP SA	High strength, Epoxy adhesive for segmental bridge	75MPa		up to 10mm
9	webertec 303 HFG	Highly fluid post-tensioning grout	50MPa	1% to 5%	
	webertec PT grout	Highly fluid post-tensioning grout with low chloride ion penetration	> 60MPa	< 2%	
10	webertec MC 1	Easy to use micro-concrete	> 60MPa		up to 200mm
Application	Waterproofing	Description	Horizontal surface	Vertical surface	Thickness
11	Biflex range	SBS modified bituminous membrane with double reinforcements	yes	yes	4mm
	Biplas range	APP modified bituminous membrane with double reinforcements	yes	yes	4mm
	weberdry poly H	Two-component fast setting hybrid polyurea membrane	yes	yes	2.5mm
12	weberdry RBE	Rubberized bitumen cold applied emulsion	yes	yes	
	SELF-AD X	Self adhesive cold applied bituminous waterproofing membrane	yes	yes	1.6 & 2mm
Application	Sealants	Description	Elongation	MAF	Width
13	weber seal PS 1000 GG/PG	Two-component polysulphide joint sealant	> 600%	25%	50mm
	weber jointseal PU MC	One-component polyurethane sealant and adhesive	> 500%	25%	40mm

Tunnels

1

5

2

3

4

6

7

8

10

12

11



13

9



15

14

- 1 webercem spray DS
- 2 weberep epo 655 i
- 3 weberep epo 412 CRY plus
- 4 weberep 360 FFR
- 5 weberdry 600 i
weberdry 610 i
- 6 webercote beton plus
- 7 weber seal PS 1000 GG/PG
weber jointseal PU MC
- 8 weberanc 405 BFX
- 9 weberep 501 ZRP
- 10 weberep 331 TX
- 11 webertec 301
- 12 weberdry poly H
- 13 SELF-AD X
- 14 Biplas PL
- 15 weberdry waterstop

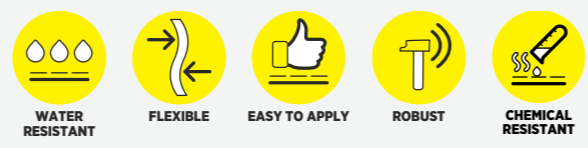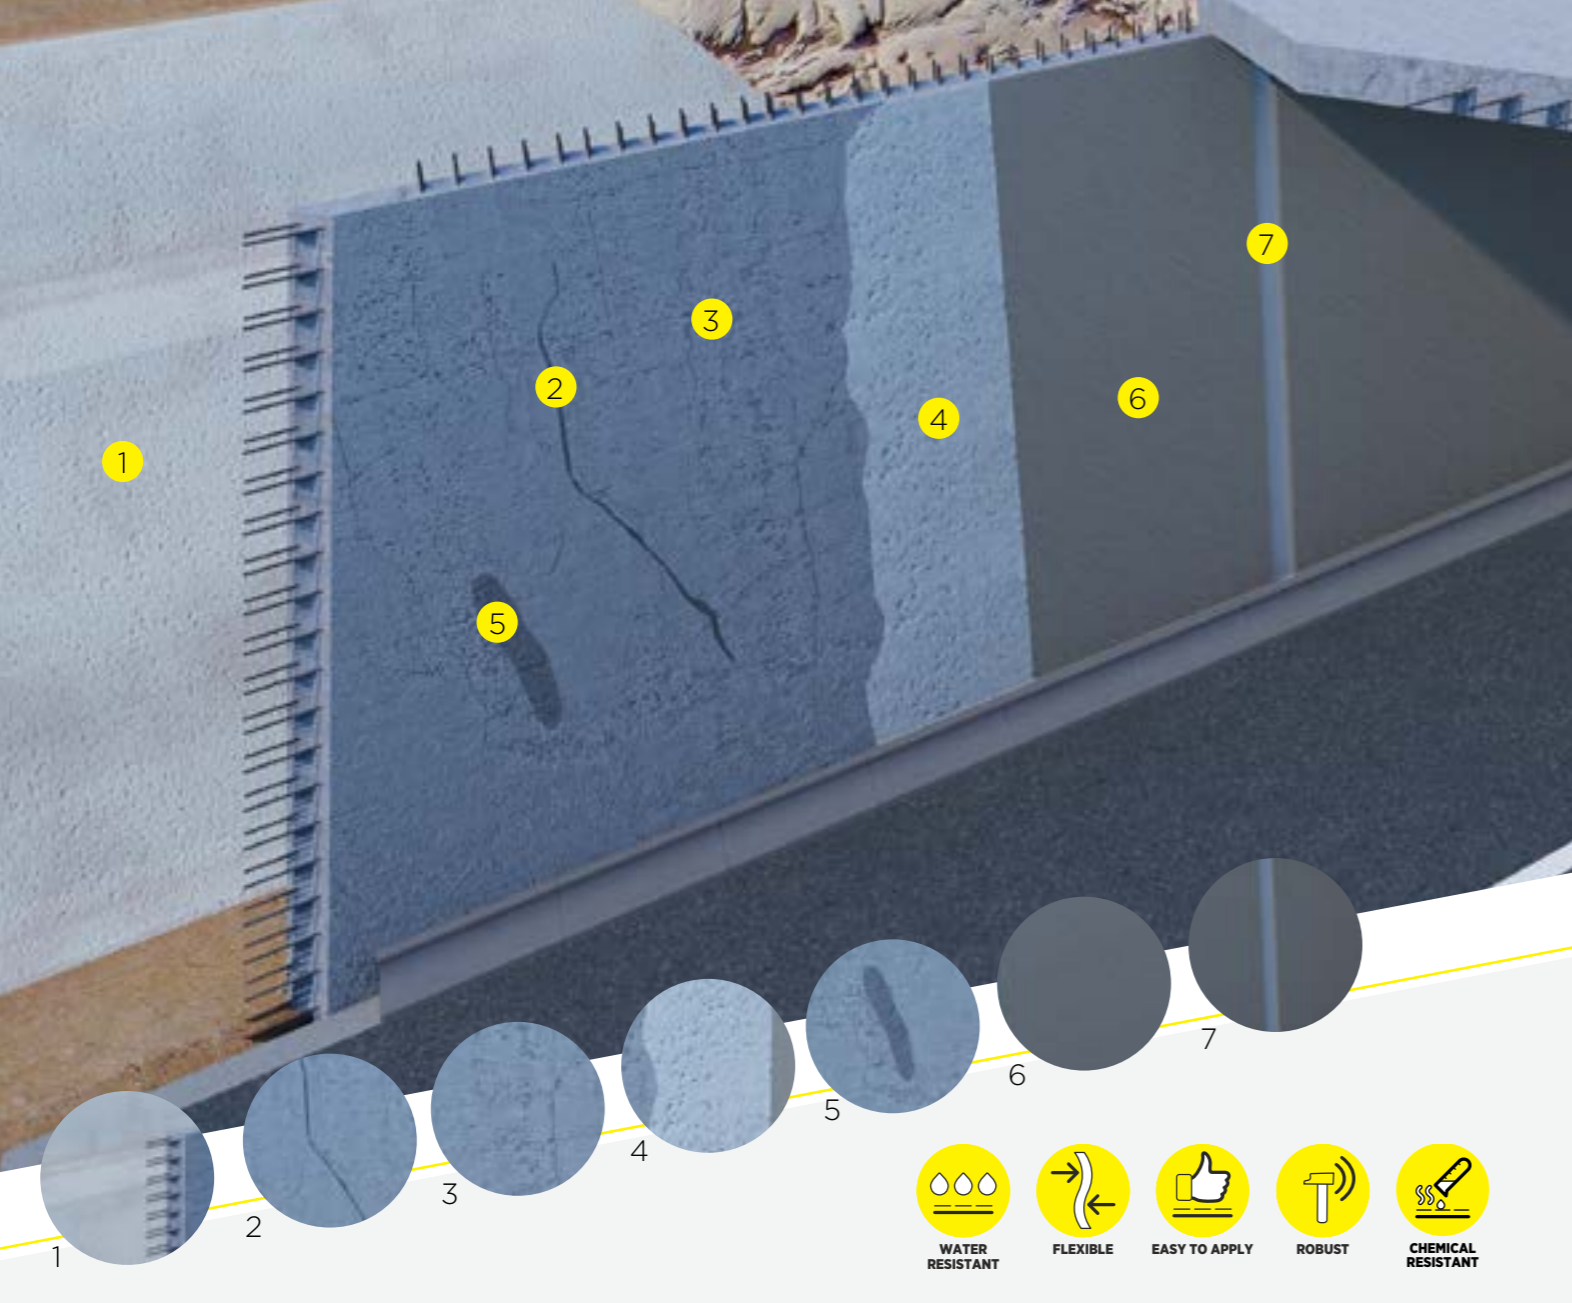


Application	Concrete repair & anchoring	Description	CS	FS	Thickness
1	webercem spray DS	Polymer modified dry-spray structural repair concrete	≥ 45MPa		up to 150mm
2	weberep epo 655 i	very low viscosity epoxy injection resin	75MPa		
3	weberep epo 412 CRY plus	High strength, thixotropic epoxy patching and bonding paste	70MPa	30MPa	up to 3mm
4	weberep 360 FFR	Pre-mixed cementitious filler for fair face repair	> 15MPa	> 4MPa	up to 3mm
Application	Waterproofing	Description	TS	Elongation	Free expansion
5	weberdry 600 i	Flexible water sealing two-component polyurethane injection resin	> 3MPa	128%	
	weberdry 610 i	Foam forming water sealing injection resin			1700% to 2200%
Application	Protective coating	Description	Pull of strength	Crack bridging	Thickness
6	webercote beton plus	Protective anti-carbonation coating for concrete	> 2 MPa	> 2mm	WFT: 300-350 microns/coat
Application	Sealants	Description	Elongation	MAF	Width
7	weber seal PS 1000 GG/PG	Two-component polysulphide joint sealant	> 600%	25%	50mm
	weber jointseal PU MC	One-component polyurethane sealant and adhesive	> 500%	25%	40mm

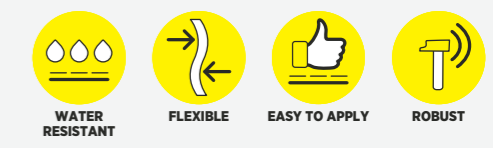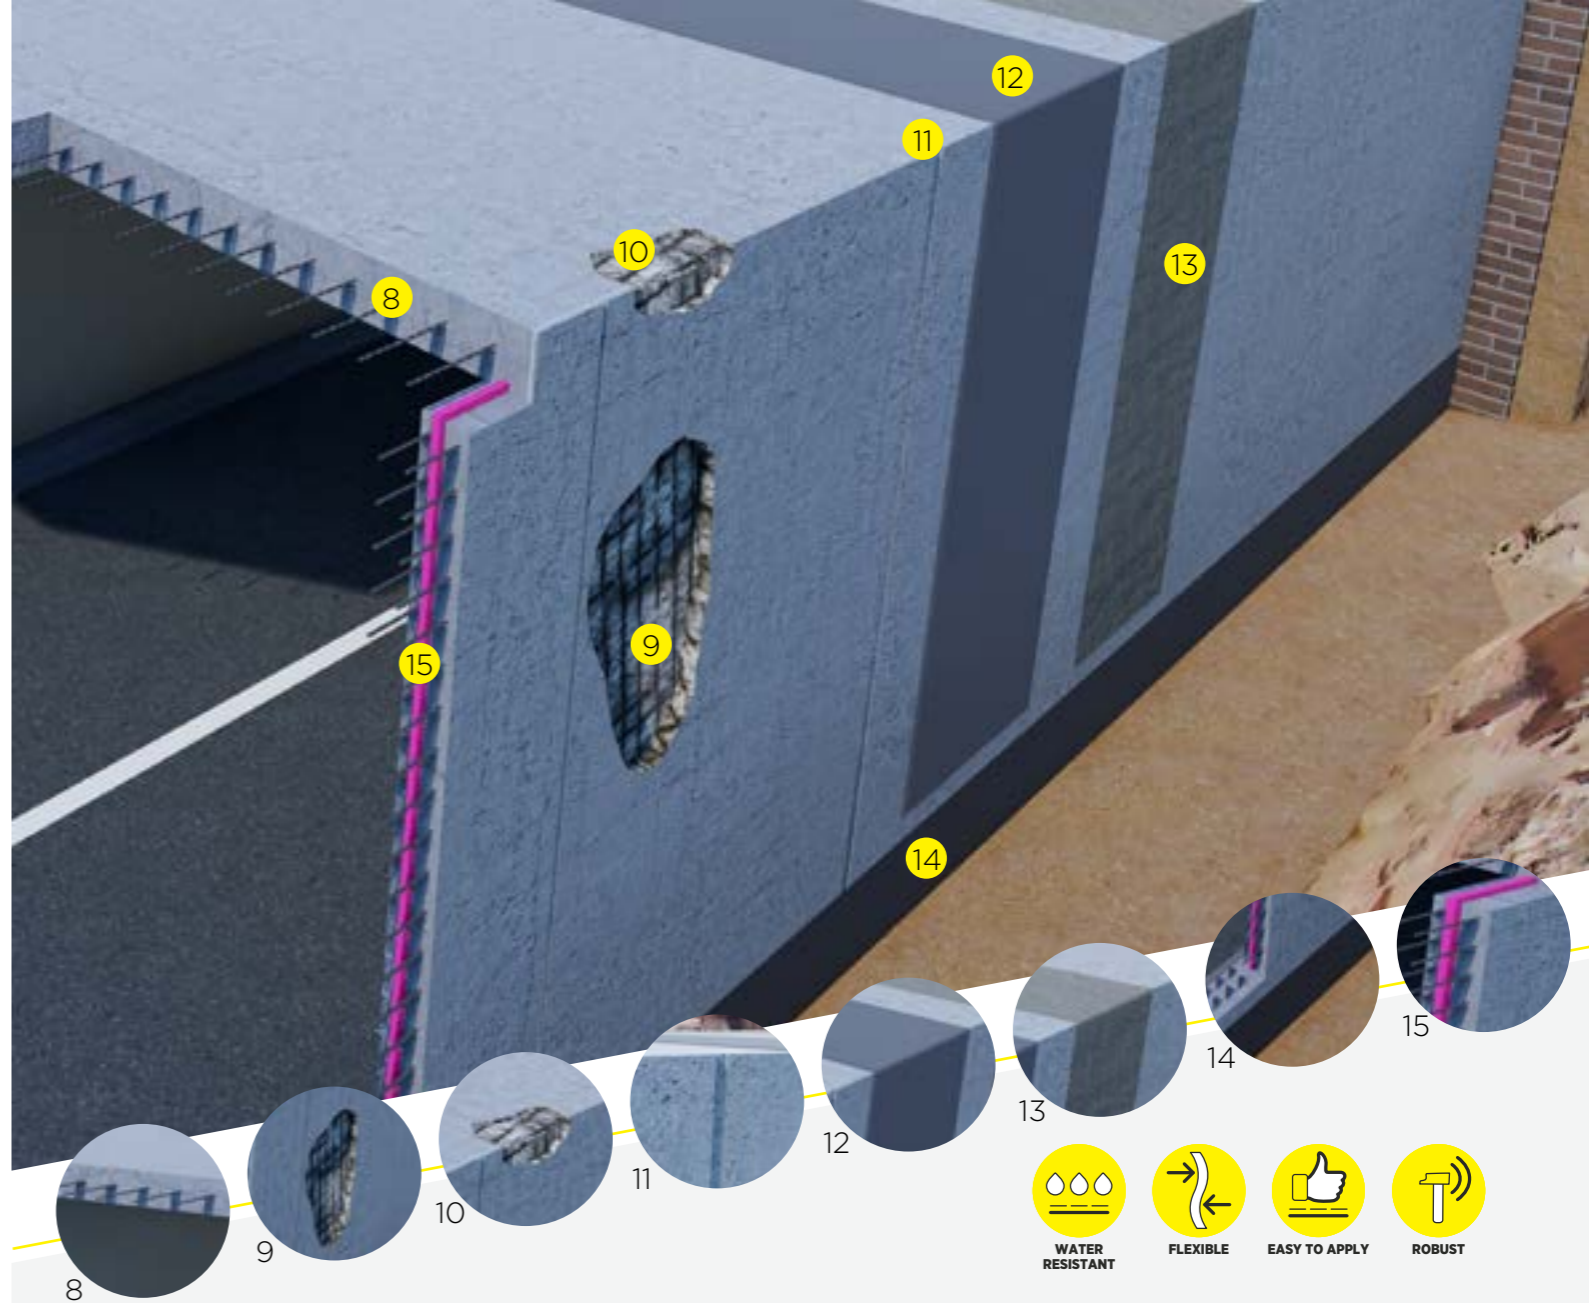


Application	Concrete repair & anchoring	Description	CS	FS	Thickness
8	weberanc 405 BFX	Pure epoxy anchoring resin in cartridge	> 80MPa		
9	weberep 501 ZRP	Heavy duty anti-corrosive zinc-rich phosphate primer			Up to 190 microns WFT/coat
10	weberep 331 TX	Non-shrink thixotropic repair mortar with fiber	60MPa	7MPa	up to 50 mm per coat
Application	Grouting & bedding	Description	CS	FS	Thickness
11	webertec 301	Non-shrink structural grout	> 50Mpa	6MPa	up to 100mm
Application	Waterproofing	Description		Vertical surface	Thickness
12	weberdry poly H	Two-component fast setting hybrid polyurea membrane	yes	yes	2.5mm
13	SELF-AD X	Self-adhesive cold applied bituminous waterproofing membrane	yes	yes	1.6 & 2mm
14	Biplas PL	APP modified bituminous membrane - Plain	yes	yes	4mm
15	weberdry waterstop	PVC waterstops for construction and expansion joints	yes	yes	3&4mm

Car park & Roads

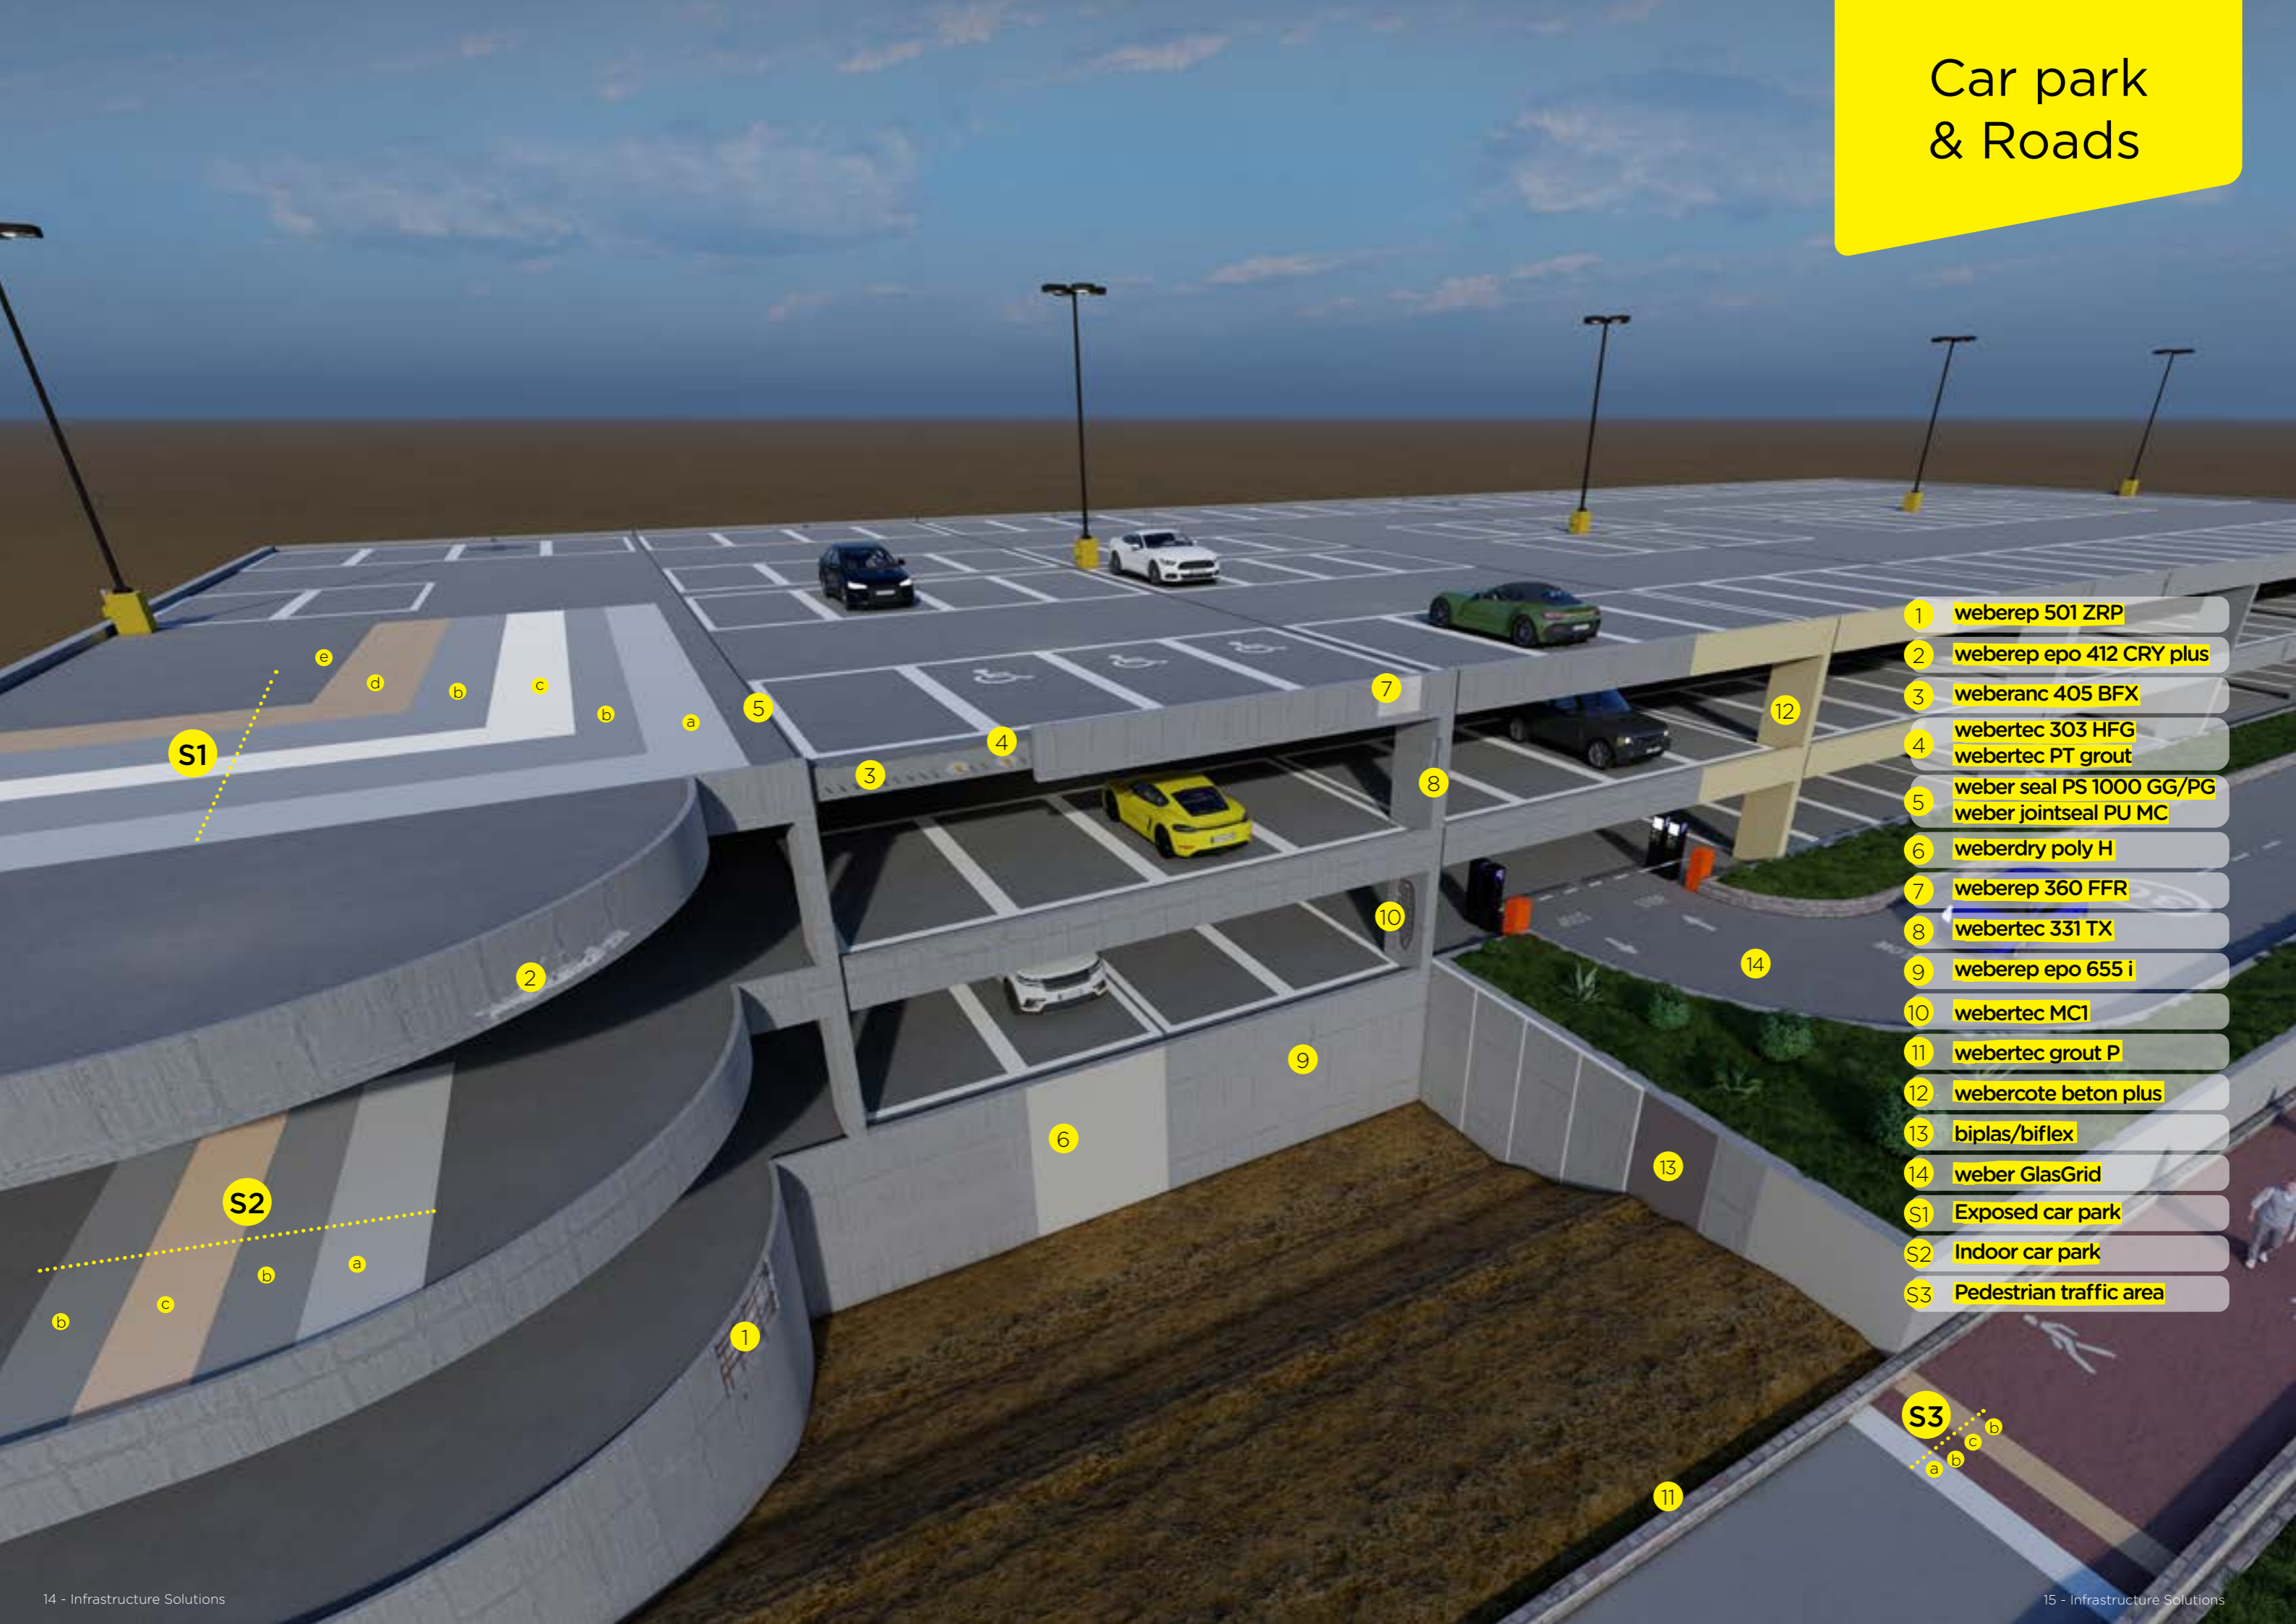


- 1 weberrep 501 ZRP
- 2 weberrep epo 412 CRY plus
- 3 weberanc 405 BFX
- 4 webertec 303 HFG
webertec PT grout
- 5 weber seal PS 1000 GG/PG
weber jointseal PU MC
- 6 weberdry poly H
- 7 weberrep 360 FFR
- 8 webertec 331 TX
- 9 weberrep epo 655 i
- 10 webertec MC1
- 11 webertec grout P
- 12 webercote beton plus
- 13 biplas/biflex
- 14 weber GlasGrid
- S1 Exposed car park
- S2 Indoor car park
- S3 Pedestrian traffic area

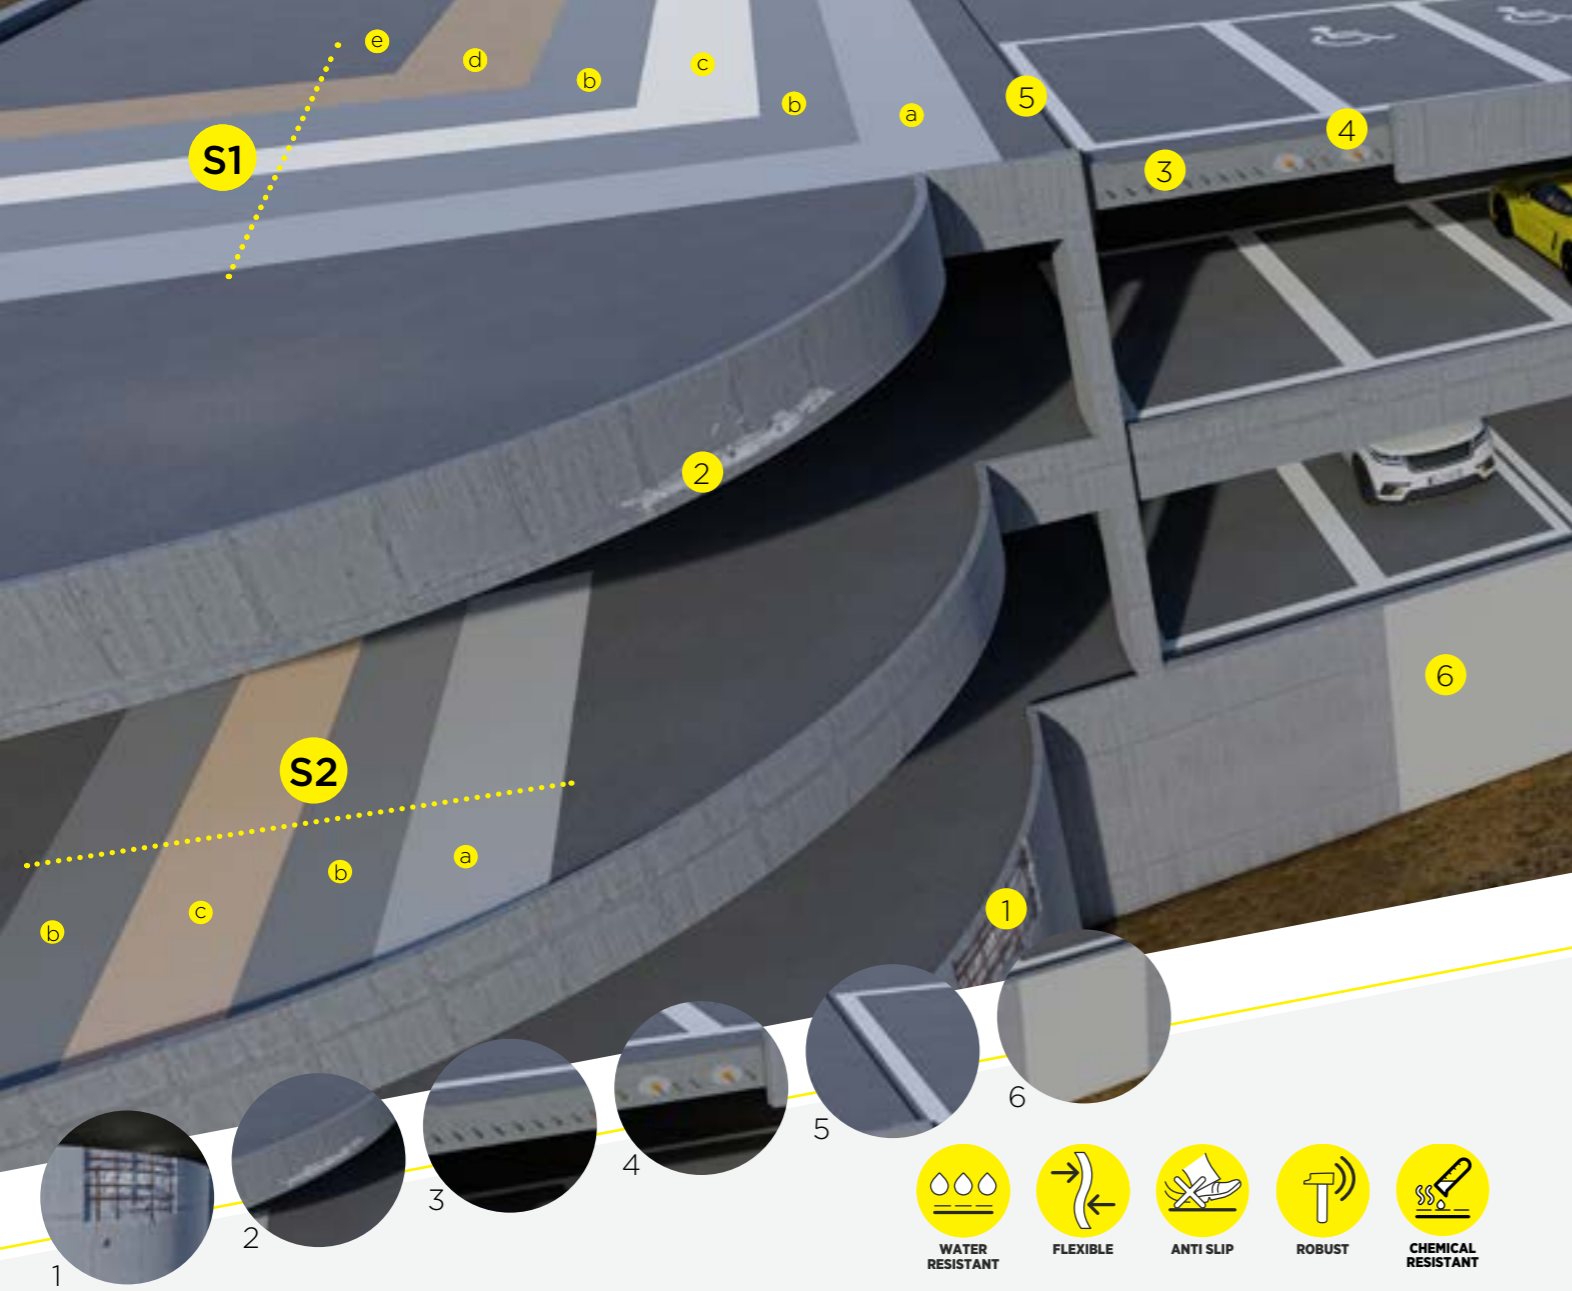


Application	Concrete repair & anchoring	Description	CS	FS	Thickness
1	weberrep 501 ZRP	Heavy duty anti-corrosive zinc-rich phosphate primer			Up to 190 microns WFT/coat
2	weberrep epo 412 CRY plus	High strength, thixotropic epoxy patching and bonding paste	70MPa	30MPa	up to 3mm
3	weberanc 405 BFX	Pure epoxy anchoring resin in cartridge	> 80MPa		
Application	Grouting & bedding	Description	CS	Expansion	Chloride content
4	webertec 303 HFG	Highly fluid post-tensioning grout	50 MPa	1% to 5%	<0.1%
	webertec PT grout	Highly fluid post-tensioning grout with low chloride ion penetration	> 60MPa	< 2%	<0.1%
Application	Sealants	Description	Elongation	MAF	Width
5	weber seal PS 1000 GG/PG	Two-component polysulphide joint sealant	> 600%	25%	50mm
	weber jointseal PU MC	One-component polyurethane sealant and adhesive	> 500%	25%	40mm
Application	Waterproofing	Description	Elongation	Puncture resistance	Crack bridging
6	weberdry poly H	Two-component fast setting hybrid polyurea membrane	> 450%	>1800 N	3.2mm
Application	System	Products Name			
S1	Exposed car park	a weberfloor eposil plus b weberdry 360 PU c weberdry PUR fabric 110 d weberfloor Sil S e weberfloor 220 PU			
S2	Indoor car park	a weberfloor eposil plus b weberfloor epobat c weberfloor Sil S			




Application	Concrete repair & anchoring	Description	CS	FS	Thickness
7	weberrep 360 FFR	Pre-mixed cementitious filler for fair face repair	> 15MPa	> 4MPa	up to 3mm
8	weberrep 331 TX	Non-shrink thixotropic repair mortar with fiber	60MPa	7MPa	up to 50mm per coat
9	weberrep epo 655 i	Very low viscosity epoxy injection resin	75MPa		
Application	Grouting & bedding	Description	CS	FS	Thickness
10	webertec MC1	Easy to use micro-concrete	> 60MPa	> 9MPa	up to 200mm
11	webertec grout P	Cementitious non-shrink precision grout	≥ 60MPa	>8	up to 60mm
Application	Protective coating	Description	Pull of strength	Crack bridging	Thickness
12	webercote beton plus	Protective anti-carbonation coating for concrete	>2Mpa	>2mm	WFT: 300-350 microns/coat
Application	Waterproofing	Description	Horizontal	Vertical	Thickness
13	Biplas/Biflex	APP/SBS modified bituminous membrane	yes	yes	4mm
Application	Reinforcement	Description	Tensile Strength	Tensile Elongation	Melting Point
14	weber GlasGrid	Anti-cracking and structural reinforcement of asphalt layers	100 MPa	2,5%	>232°C
Application	System	Products Name			
S3	Pedestrian traffic area	a weberprim EP 2K b weberdry PUR coat traffic c weberfloor Sil S			

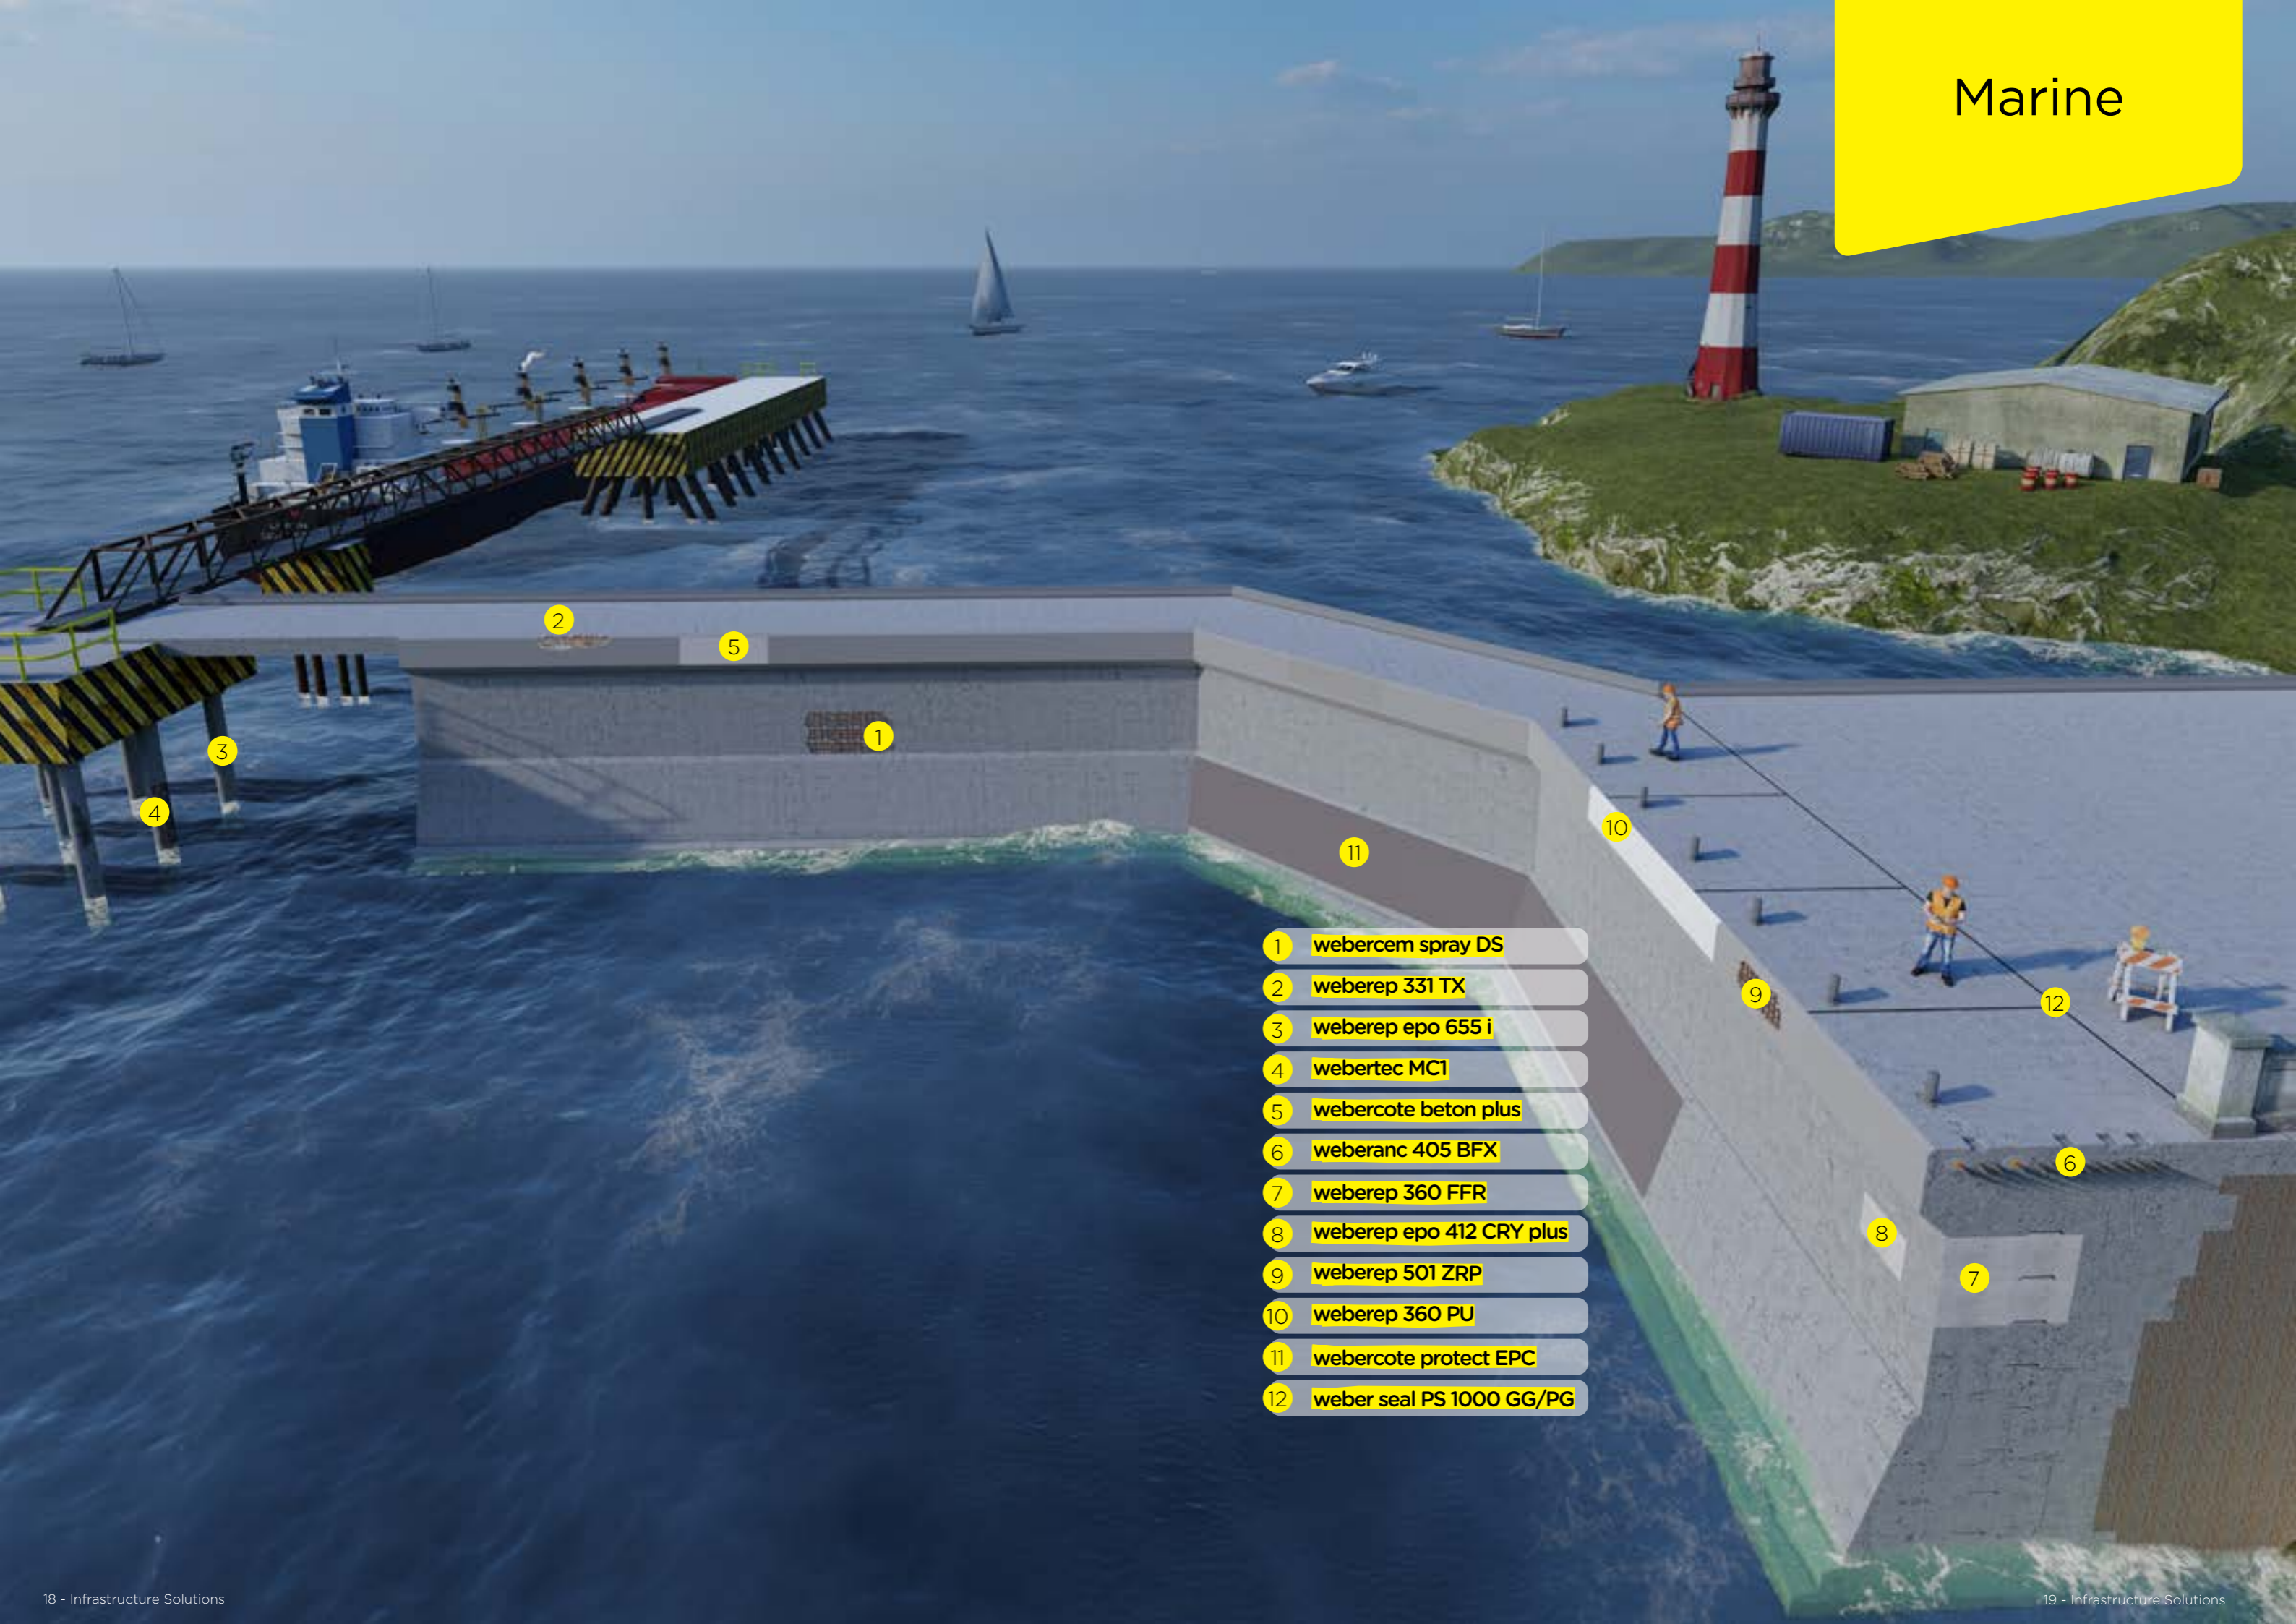

- 1 webercem spray DS
- 2 weberep 331 TX
- 3 weberep epo 655 i
- 4 webertec MCI
- 5 webercote beton plus
- 6 weberanc 405 BFX
- 7 weberep 360 FFR
- 8 weberep epo 412 CRY plus
- 9 weberep 501 ZRP
- 10 weberep 360 PU
- 11 webercote protect EPC
- 12 weber seal PS 1000 GG/PG

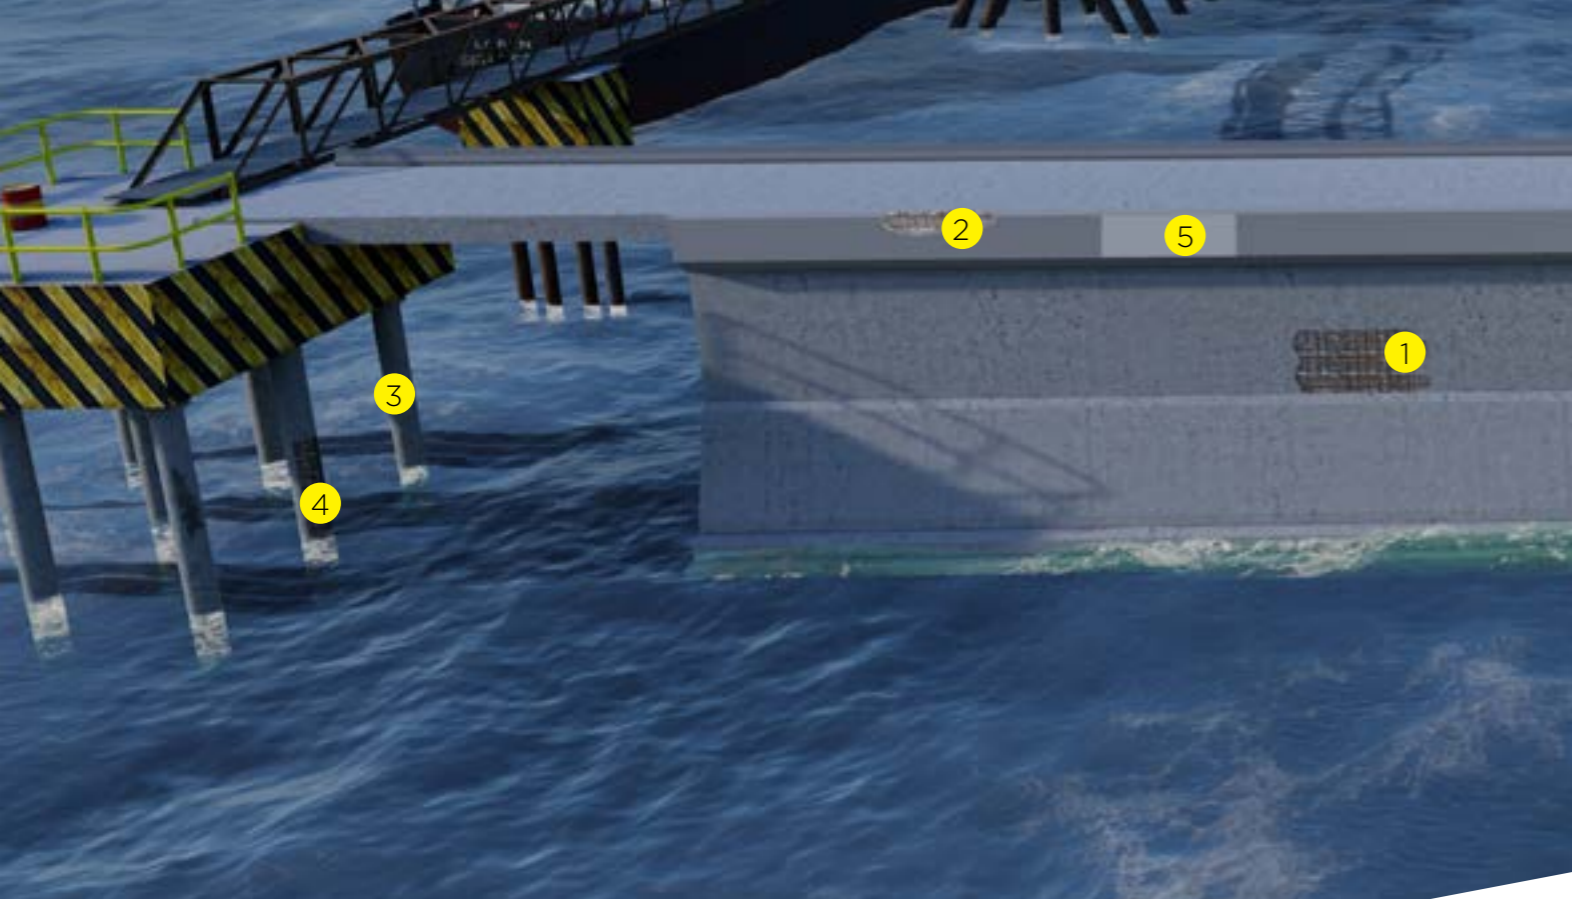

Application	Concrete repair & anchoring	Description	CS	FS	Thickness
1	webercem spray DS	Polymer modified dry-spray structural repair concrete	≥ 45MPa		up to 150mm
2	weberrep 331 TX	Non-shrink thixotropic repair mortar with fiber	60MPa	7MPa	up to 50mm per coat
3	weberrep epo 655 i	very low viscosity epoxy injection resin	75MPa		
Application	Grouting & bedding	Description	CS	TS	Thickness
4	webertec MC 1	Easy to use micro-concrete	> 60MPa	> 9MPa	up to 200mm
Application	Protective coating	Description	Pull of strength	Crack bridging	Thickness
5	webercote beton plus	Protective anti-carbonation coating for concrete	> 2MPa	> 2mm	WFT: 300-350 microns/coat

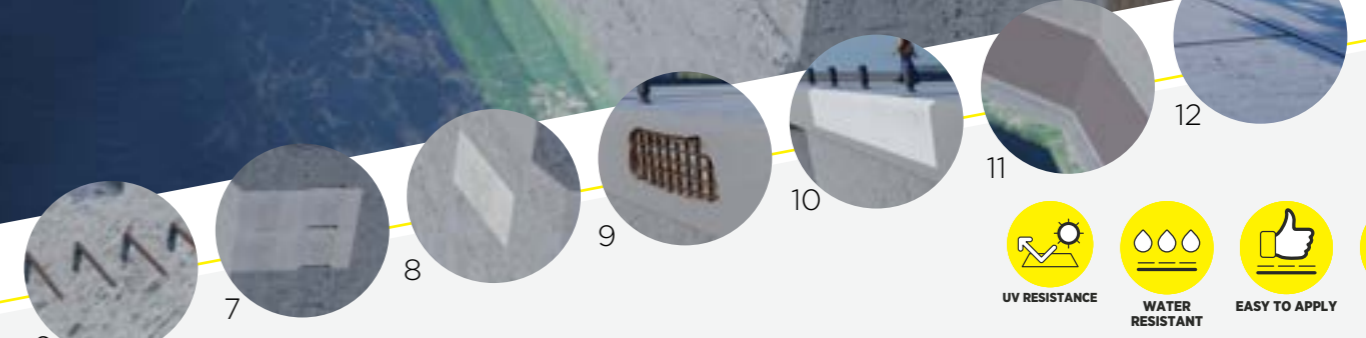

Application	Concrete repair & anchoring	Description	CS	FS	Thickness
6	weberanc 405 BFX	Pure epoxy anchoring resin in cartridge	> 80MPa		
7	weberrep 360 FFR	Pre-mixed cementitious filler for fair face repair	> 15MPa	> 4MPa	up to 3mm
8	weberrep epo 412 CRY plus	High strength, thixotropic epoxy patching and bonding paste	70MPa	30MPa	up to 3mm
9	weberrep 501 ZRP	Heavy duty anti-corrosive zinc-rich phosphate primer			Up to 190 microns WFT/coat
Application	Waterproofing	Description	Elongation	Tensile strength	Crack bridging
10	weberdry 360 PU	Liquid applied polyurethane waterproofing membrane-UV Resistant	600%	> 4MPa	up to 2mm
Application	Protective coating	Description	Elongation	Crack bridging	Shore A hardness
11	webercote protect EPC	Elastomeric, chemical resistant epoxy polysulphide coating	> 27%	2.5mm	90
Application	Sealants	Description	Elongation	MAF	Width
12	weber seal PS 1000 GG/PG	Two-component polysulphide joint sealant	> 600%	25%	50mm

Airports

Concrete repair & anchoring

Grouting & bedding

Crack injection


Protective coatings

Waterproofing & roofing

Sealants

Flooring


Aprons & Taxiways

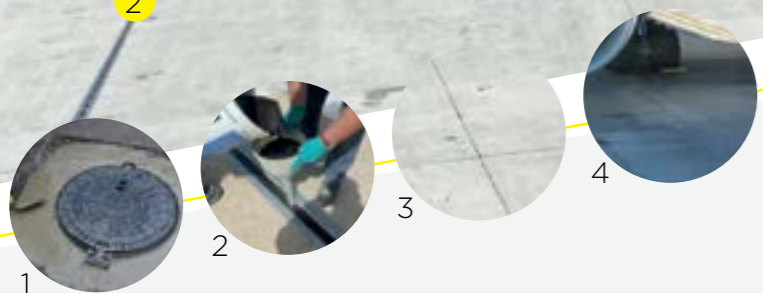

- EASY TO APPLY
- RAPID SET
- FLEXIBLE
- ROBUST

Application	Concrete repair & anchoring	Description	CS	FS	Thickness
1	weberep 314 RD	High early strength and fast setting filling mortar with fiber	> 50MPa		up to 30mm
Application	Grouting & bedding	Description	CS	TS	Thickness
2	webertec cable grout	Fast-setting pourable grout for filling cable slots	13MPa at 2hrs	10MPa at 2hrs	5 to 16mm
Application	Sealants	Description	Elongation	MAF	Thickness
3	weber seal PS 1000 PG/GG	Two-component polysulphide joint sealant	> 600%	± 25%	50mm
4	weber seal PS 2000 JF	Two part cold applied elastomeric polysulphide jet fuel resistant joint sealant	> 600%	± 25%	50mm

Runways

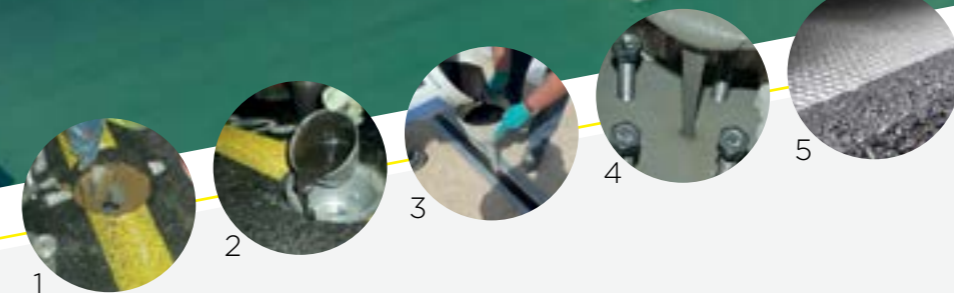


- RAPID SET
- EASY TO APPLY
- ROBUST

Application	Grouting & bedding	Description	CS	FS	TS	Compatibility
1	webertec bedding mortar	Polyester-based mortar for bedding and airport lighting bases	50MPa at 2hrs	12MPa at 3hrs	10MPa at 3hrs	Asphalt & concrete
2	webertec grout FG	Fast setting, high-strength flowing grout for fixing airport lighting units				Asphalt & concrete
3	webertec cable grout	Fast setting pourable grout for filling cable slots	13MPa at 2hrs	10MPa at 2hrs	3.5MPa	Asphalt & concrete
4	webertec 301	Non-shrink structural grout	60MPa	8MPa		Concrete
Application	Reinforcement	Description	Tensile Strength	Tensile Elongation	Melting Point	Compatibility
5	weber GlasGrid	Anti-cracking and structural reinforcement of asphalt layers	100MPa	2,5%	>232°C	Asphalt & concrete



Aircraft hangars

S1

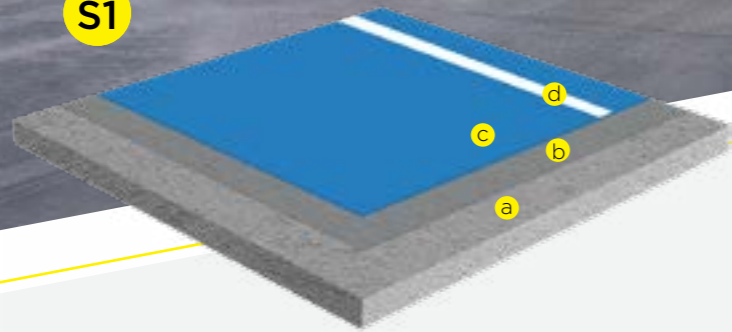


- ABRASION RESISTANCE
- ANTI SLIP
- ROBUST

Application	System	Description	CS	FS	Solid content	Color
S1	a weberep 412 CRY plus	High strength, thixotropic epoxy patching and bonding paste	70MPa	30MPa		Grey
	b weberfloor eposil plus	Solvent free epoxy sealing primer			100%	Transparent
	c weberfloor epopark	Solvent free epoxy easy leveling for flooring system	> 85MPa	> 17MPa	100%	Grey, yellow, red & others
	d weberfloor roadmark AL	High build, fast drying, non-bleeding alkyd traffic paint			48%	White, black, yellow, and red



Control tower

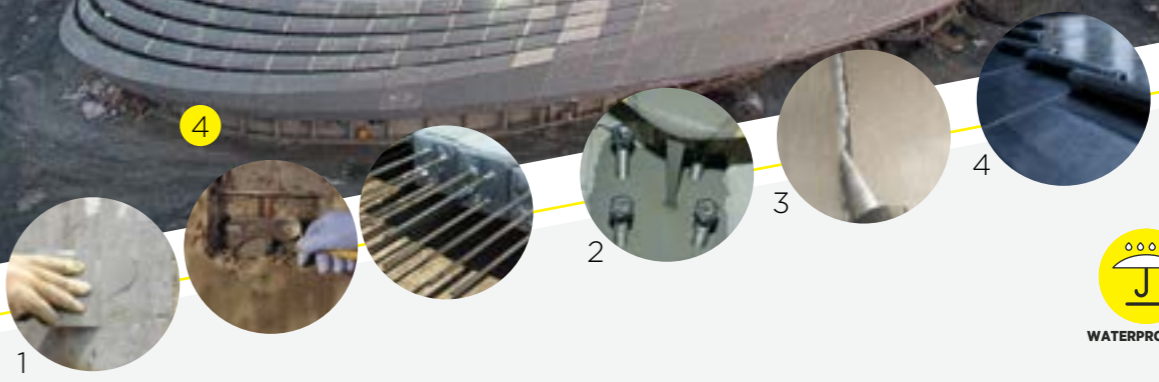






- WATERPROOFING
- FLEXIBLE
- ROBUST

Application	Concrete repair & anchoring	Description	CS	FS	Thickness
1	weberep 360 FFR	Pre-mixed cementitious filler for fair face repair	> 15MPa	> 4MPa	up to 3mm
	weberep 331 TX	Non shrink thixotropic repair mortar with fiber	60MPa	7MPa	up to 50mm per coat
	weberanc 405 BFX	Pure epoxy anchoring resin in cartridge	> 80MPa		
Application	Grouting & bedding	Description	CS	TS	Thickness
2	webertec MC1	Easy to use micro-concrete	> 60MPa	> 9MPa	up to 200mm
Application	Sealants	Description	Elongation	MAF	Width
3	weber jointseal PU MC	One-component polyurethane sealant and adhesive	> 500%	25%	40mm
Application	Waterproofing	Description	Horizontal surface	Vertical surface	Thickness
4	Biflex/Biplas range	SBS/APP modified bituminous membrane with double reinforcements	yes	yes	4mm

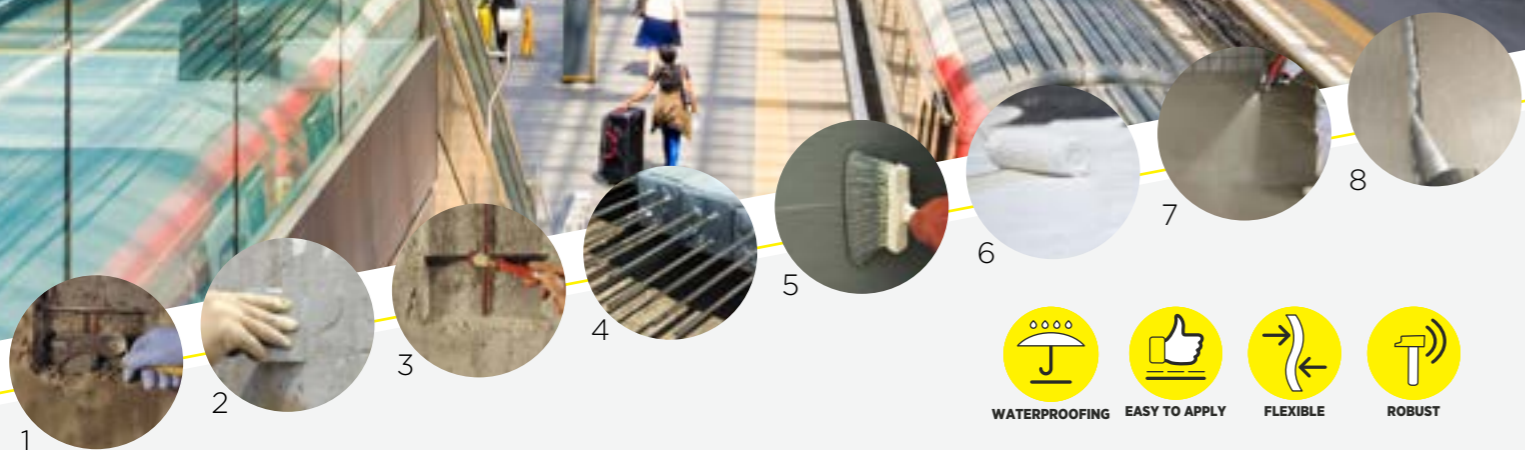Railway stations





- Concrete repair & anchoring
- Grouting & bedding
- Crack injection
- Protective coatings
- Waterproofing & roofing
- Sealants
- Flooring



- 
WATERPROOFING
- 
EASY TO APPLY
- 
FLEXIBLE
- 
ROBUST

Application	Concrete repair & anchoring	Description	CS	FS	Thickness
1	weberrep 331 TX	Non shrink thixotropic repair mortar with fiber	60MPa	7MPa	up to 50mm/coat
2	weberrep 360 FFR	Pre-mixed cementitious filler for fair face repair	> 15MPa	> 4MPa	up to 3mm
3	weberrep 501 ZRP	Heavy duty anti-corrosive zinc-rich phosphate primer			Up to 190 microns WFT/coat
4	weberanc 405 BFX	Pure epoxy anchoring resin in cartridge	> 80MPa		
Application	Waterproofing	Description	Elongation	Tensile strength	Crack bridging
5	weberdry 110 FX	Flexible high performance cement-based waterproof coating		> 1MPa	> 1mm
6	weberdry 360 PU	Liquid applied polyurethane waterproofing membrane-UV resistant	600%	> 4MPa	up to 2mm
7	weberdry poly H	Two-component fast setting hybrid polyurea membrane	> 450%	> 15MPa	3.2mm
Application	Sealants	Description	Elongation	MAF	Width
8	weber jointseal PU MC	One-component polyurethane sealant and adhesive	> 500%	25%	40mm




- 
FLEXIBLE
- 
RAPID SET
- 
EASY TO APPLY
- 
ROBUST

Application	Concrete repair & anchoring	Description	CS	FS	Thickness
1	weberrep 314 RD	High early strength and fast setting filling mortar with fiber	> 50MPa		up to 30mm
Application	Grouting & bedding	Description	CS	FS	Thickness
2	webertec 301	Non-shrink structural grout	> 50MPa	6MPa	up to 100mm
3	webertec epo 430 GRT plus	Free flowing high strength epoxy grout	100MPa	30MPa	Up to 450mm
Application	Sealants	Description	Elongation	MAF	Thickness
4	weber seal PS 1000 PG/GG	Two-component polysulphide joint sealant	> 600%	± 25%	50mm

Concrete repair, anchoring & grouting



Waterproofing & sealants

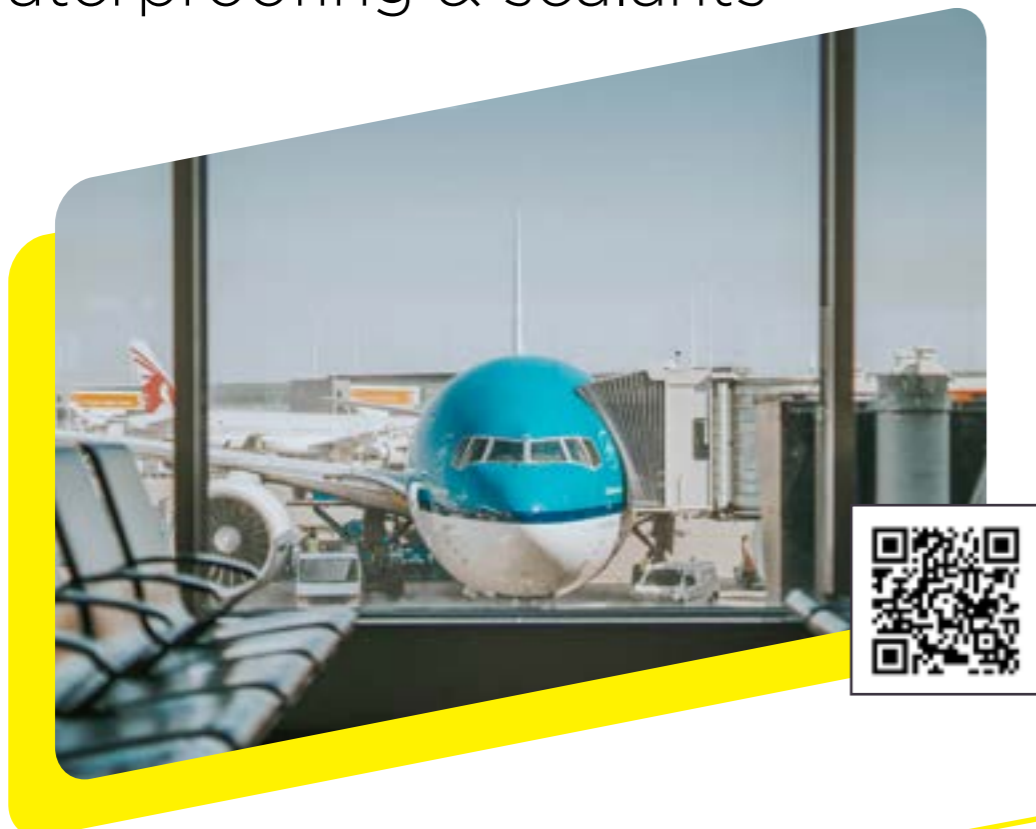

Weber products

Protective coatings



Flooring



LEBANON T +961 9 790 920/1/2/3 - M +961 3 700 892/3 - F +961 9 790 924

UAE

Abu Dhabi Branch T +971 2 550 9994 - F +971 2 550 9449

Dubai Branch T +971 4 347 2640 - F +971 4 340 3420

KSA

Jeddah T +966 12 668 3295 / +966 12 261 2722 - F +966 12 668 1498

Riyadh T +966 12 668 3295 / +966 12 261 2722 - F +966 12 668 1498

EGYPT Hotline 15802 - T +20 238274646

JORDAN T +962 6 420 0417 - F +962 6 420 0418

QATAR T +974 4442 3816 - F +974 4442 5149

KUWAIT T +965 2 571 6404 / +965 2 571 0397 - F +965 2 571 2721

OMAN T +968 24 21 83 61 - F +968 24 21 83 62

Visit our website



@Saint-Gobain Weber Middle East



@Sodamco weber