

weber.col prime

formerly "Colle primer"

TILE ADHESIVES
& GROUTS

PRIMER BEFORE TILING ON DIFFICULT SUBSTRATES

PRODUCT

weber.col prime is a specially formulated acrylic dispersion for use as a primer before tiling to improve application and adhesion of tile adhesives. weber.col prime prevents over-rapid absorption of water into very absorbent substrate, such as foamed concrete blocks. It prolongs the open time of the tile adhesives.

ADMISSIBLE SUBSTRATES

To prepare and stabilize porous surfaces prior to tiling and to improve adhesion of tile adhesives on difficult substrates, such as vinyl tiles, timber, asphalt and terrazzo etc. Also prevents swelling of timber.

CHARACTERISTICS

Density	Approx 1 kg / lit
Color	Milky white
Drying time	1/2 to 2 hours depending on Application rate and climatic Conditions
Service Temperature	-20°C to +70°C

INSTRUCTIONS FOR USE

PREPARATION OF THE SUBSTRATE

The substrate must be perfectly sound, clean, dry and free from grease, oil, dust or any contamination that may prevent adhesion.


PRODUCT APPLICATION

Shake container well before use. Apply the primer evenly, using a brush, roller or small broom, over the sound, clean and dust-free surface and leave to dry to a clear thin film before applying the tile adhesives.

It is important that the primer fill the entire surface to ensure a solid bond of the tile adhesives. Avoid forming of puddles.

Extremely porous substrates may require two priming coats.

Clean tools with water when wet.

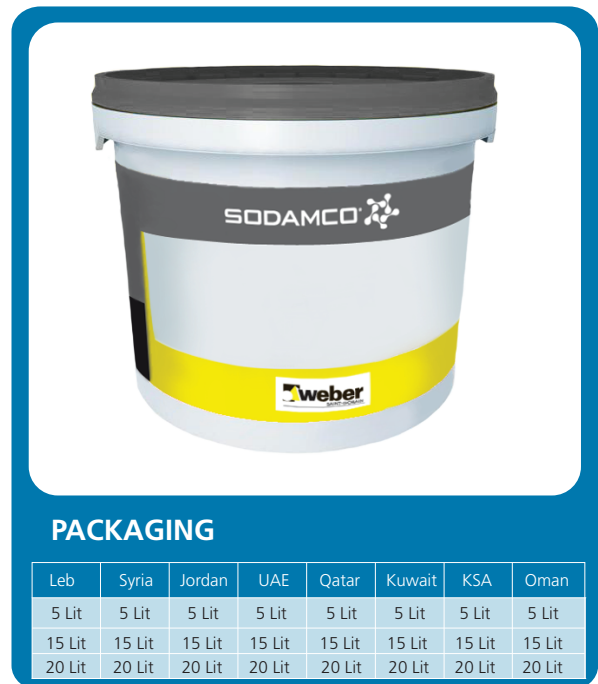

PACKAGING

Leb	Syria	Jordan	UAE	Qatar	Kuwait	KSA	Oman
5 Lit	5 Lit	5 Lit	5 Lit	5 Lit	5 Lit	5 Lit	5 Lit
15 Lit	15 Lit	15 Lit	15 Lit	15 Lit	15 Lit	15 Lit	15 Lit
20 Lit	20 Lit	20 Lit	20 Lit	20 Lit	20 Lit	20 Lit	20 Lit

COVERAGE

100 to 300 ml/m² depending on the roughness and absorbency of the substrate.

STORAGE

weber.col prime has high storage stability from -20°C to +45°C. Can be stored up to 6 months after manufacturing date, in original packaging.

SAFETY PRECAUTIONS

Avoid prolonged contact with skin. Wear protective gear for hands & eyes. Splashes on the skin should be washed away by cleaning with soap and water. In case of contact with eyes, wash thoroughly with clean water. If swallowed, do not induce vomiting, in both cases seek medical attention. The product is non-flammable.

weber.col prime

formerly "Colle primer "

DISCLAIMER

While the company guarantees its products against defective materials, all recommendations concerning the use and application of these products are made without guarantee since the conditions of their application are beyond its control. It is recommended to verify with the company that the product is suitable for the intended use, and that this Data Sheet version is the latest one. The company may modify it without prior notice. Technical characteristics are listed for guidance only. For more information, please contact the company's office in your location.

NOTE

The information included on this Technical Data Sheet is the sole property of SODAMCO Holding. The unauthorized disclosure, use, dissemination or copying (either whole or partial) of this data sheet or any information it contains, is prohibited and subject to legal pursuit.

PG 17
Edition:05/13-A



SODAMCO Holding Tayar Center Bloc B 1st flr. De Gaulle str. P.O.Box 55-44 Sin el Fil Beirut Lebanon
T +961 1 510863/4 M +961 3 380748 F +961 1 510862 sodamco@sodamco.com www.sodamco.com

Lebanon . UAE . Syria . Qatar . KSA . Jordan . Kuwait . Oman